




Datenblatt - Fiche technique - Data sheet

21.15.1682


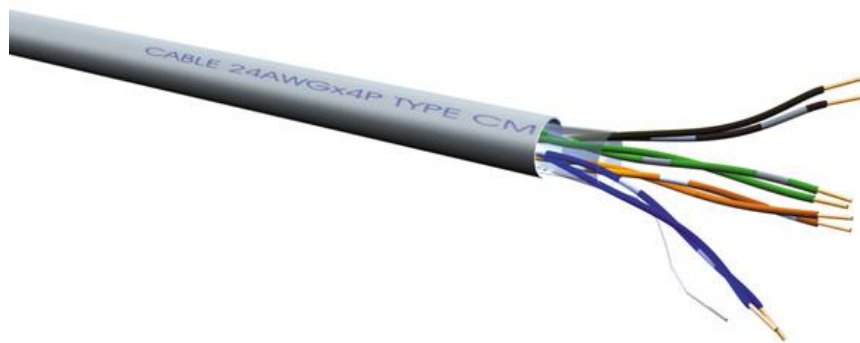


ROLINE UTP Kabel, Kat. 6a, Litze, 300 m


ROLINE Câble UTP Cat. 6a / 10 Gigabit, fils tressés, 300 m

ROLINE UTP Cable Cat.6a, Stranded, 300 m

SCALE 8/1

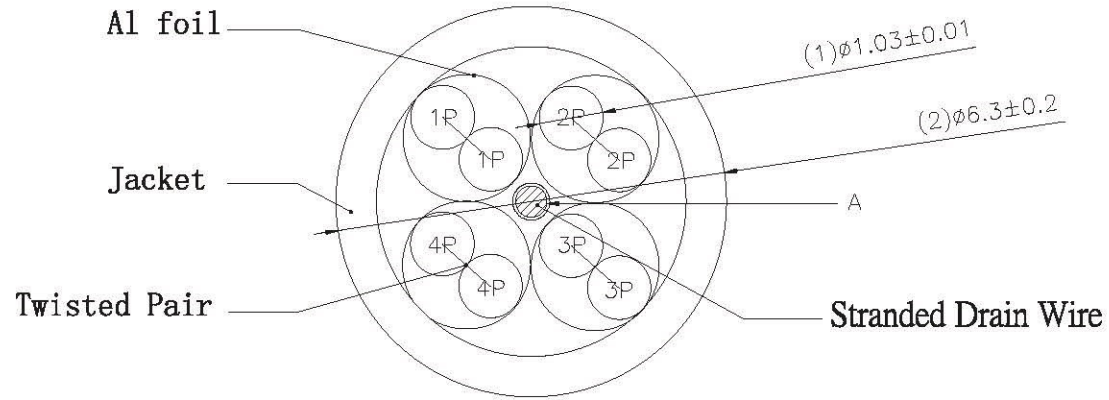

SCALE 1/2

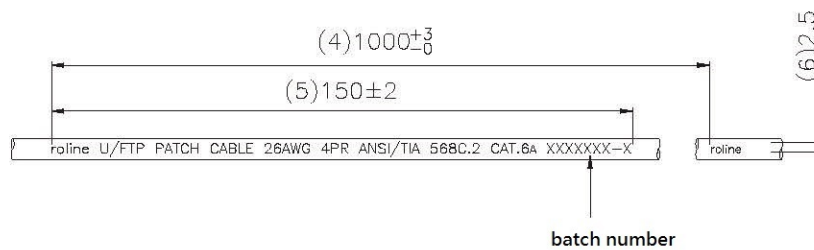

SCALE 1/1

roline U/FTP PATCH CABLE 26AWG 4PR ANSI/TIA 568C.2 CAT.6A XXXXXXXX-X

Specification:

1. Twisted pair wiring: T568B
2. Copper conductor: 26 AWG
3. XXXXXXXX-X: Batch number
4. Print legend: grey color with blue printing
5. Jacket material: PVC
6. Conductor OD:
 - Blue & White/Blue: 1.03 ± 0.01
 - Green & White/Green: 1.03 ± 0.01
 - Orange & White/ Orange: 1.03 ± 0.01
 - Brown & White/ Brown: 1.03 ± 0.01
7. Please add meter printing
0001、0002、0003.....9999 at the end of patch cord if they will be shipped as cable products
(Please be noted that printing without "M")

Item no.	21.15.1682		
Description	ROLINE Cat. 6a UTP Lan Cable, stranded, 300m, grey		
"#": Matching DIM.	DRAWING	19. Au1. 2014	byz
"*": Important DIM.	CHECK	19. Au1. 2014	Jane
Others General DIM.	APPROVAL	19. Au1. 2014	Frank
GENERAL TOLERANCE OF DIMENSIONS	DATE	NAME	
X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	SCALE	1/1 (A4)	UNIT mm
	DRAWING NO.		
	DRAWING CLASSIFICATION		S SHEET 1 OF 1

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER
1					