




**Datenblatt - Fiche technique - Data sheet  
S3001~ S3003**



**USB 3.0 Kabel, Typ A-B**

**Câble USB 3.0 Type A-B**

**USB 3.0 Cable, Type A M – B M**

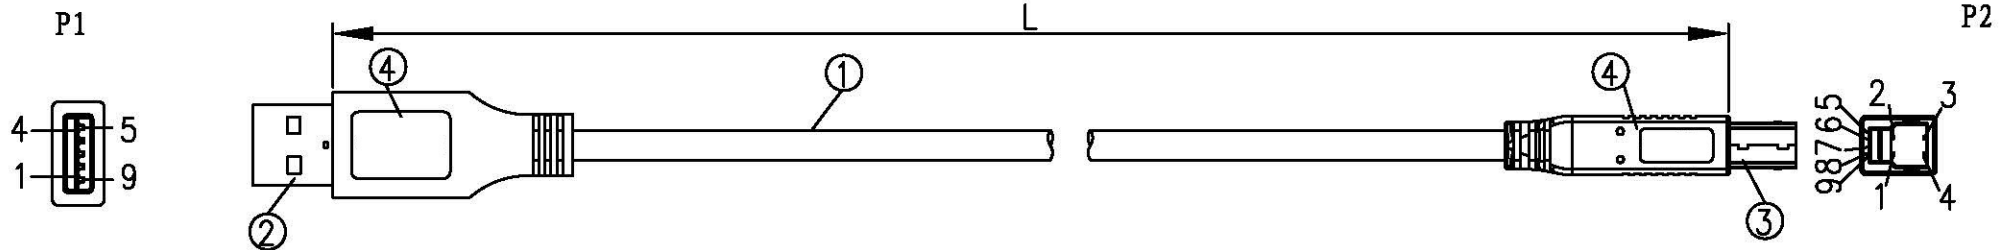

NOTES:

1. MATERIALS

1.1 CABLE: (7/0.12BC\*1P+7/0.12BC+FAM)\*2+7/0.12TC\*2C+7/0.12TC\*1P  
 +AM+7/0.12BC+128/0.12ALM+BEIGE PVC JACKET.  
 OD=5.0 ± 0.2MM.

CABLE PRINTING: E324703  AWM STYLE 2725 80°C 30V USB 3.0 CABLE

- 1.2 P1: USB3.0 A TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
- 1.3 P2: USB3.0 B TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
- 1.4 ALL HOOD: MOLDED BEIGE PVC.


2. ELECTRICAL

100% OPEN AND SHORT TEST.

3. PACKING: 1PC/PE BAG.

4. ALL MATERIAL BE ROHS COMPLIANT.

PIN UOT

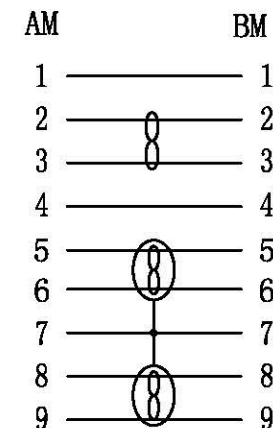


SHELL BRAID+DRAIN SHELL



P/N CHART

P/N	L
S3001	800±30MM
S3002	1800±50MM
S3003	3000±70MM

LENGTH TOLERANCE: X. ± 0.5 .X ± 0.2 .XX ± 0.1	SCALE: FREE	CUS. NAME:	<b>rotronic</b>		ENG:
ANGLE TOLERANCE: X° ±3' .X° ±1'	UNIT: mm				PRODUCT NO:
VERSION: 00	PAGE: 1/1	DRAWING NO: 0523	PRODUCT DESCRIPTION: USB 3.0 AM/BM	APPROVED:	

00	NEW ISSUE	2012-08-10
REV.	MODIFY DESCRIPTION	DATE