



Datenblatt - Fiche technique - Data sheet

**S3112-250**




USB 2.0 Kabel, Typ A-A, ST/BU, 1,8m

Câble USB 2.0 Type A-A, m/f, 1,8 m

USB 2.0 Cable, Type A-A, M - F, 1.8m

REV	DESCRIPTION
B/1	

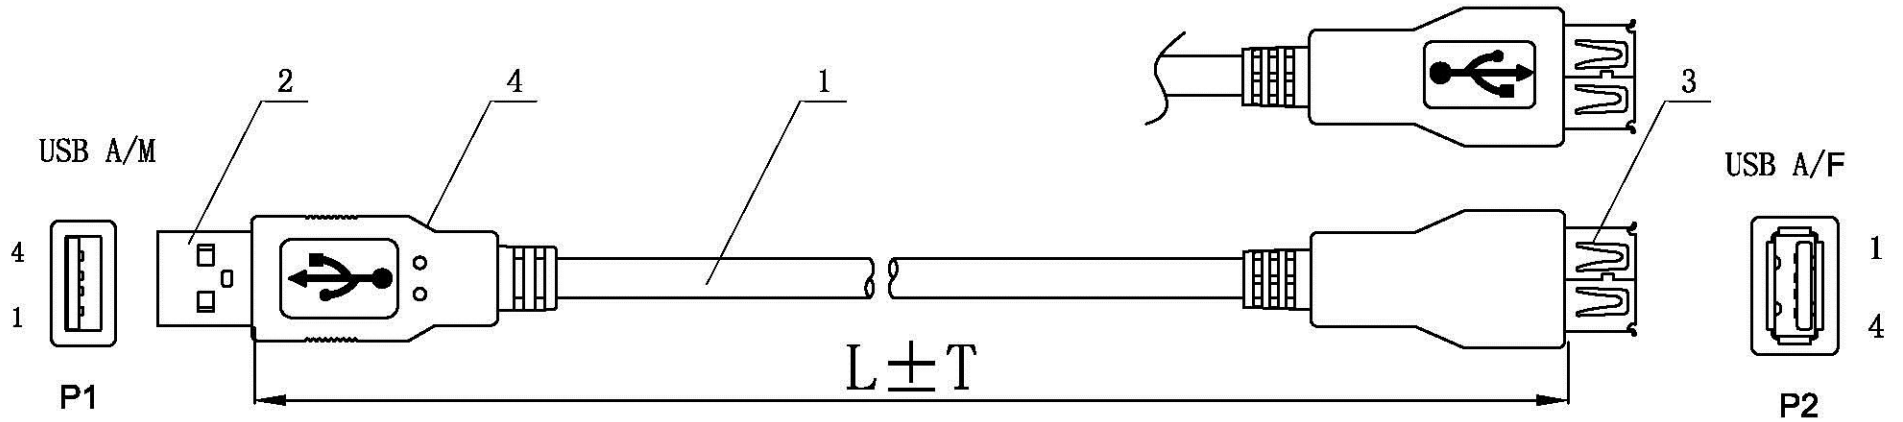


**NOTE**

**PIN OUT**

**CABLE STRUCTURE**

- Electrical test:**
  - 100% open short and miss wire test;
  - Insulation resistance: DC300V/5s 10Mohm min;
  - Dielectric strength: 150V AC/minute, 1mA.
- Package:** polybag
- Color:** Beige (Pantone #420C)

P1	P2
1 --- 1	1 RED
2 --- 2	2 WHITE
3 --- 3	3 YELLOW
4 --- 4	4 BLACK
G --- G	G DRAIN

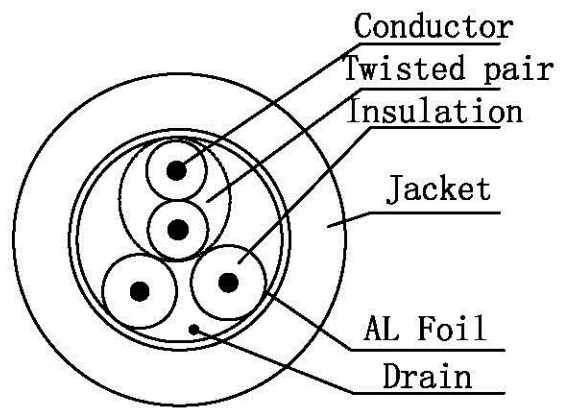

**PRODUCT FAMILY**

ITEM NO.	L (LENGTH)	T (TOLERANCE)
S3111	0.8M	0.02M
S3112	1.8M	0.03M
S3113	3M	0.05M

NO.	PART NO.	PART NAME	MATERIAL	Q' TY	REMARKS
4		MOLDING	PVC	2	Beige
3		CONNECTOR P2	USB A/F, 1U" contact, nickel plated shell	1	
2		CONNECTOR P1	USB A/M, 1U" contact, nickel plated shell	1	
1		CABLE	(7/0.12CU+PE)*1P+(7/0.12CU+PE)*2C+AL+PVC OD:4.0MM	1	Beige

<b>rotronic</b>		ITEM NO.	S3111 / S3112 / S3113			
		DESCRIPTION	USB 2.0 Cable, AM/AF, Beige			
DRAW		CONSUMER				
CHECK		DATE			REV.	A/0
APP.		SHEET	1/1	UNIT	mm	SCALE 1:1