



**Datenblatt - Fiche technique - Data sheet
S3151 ~ S3153**




USB 2.0 Kabel, USB A ST – Micro USB B ST

Câble USB 2.0, USB A mâle – Micro USB B mâle

USB 2.0 Cable, USB Type A M – Micro USB B M


REV	DESCRIPTION

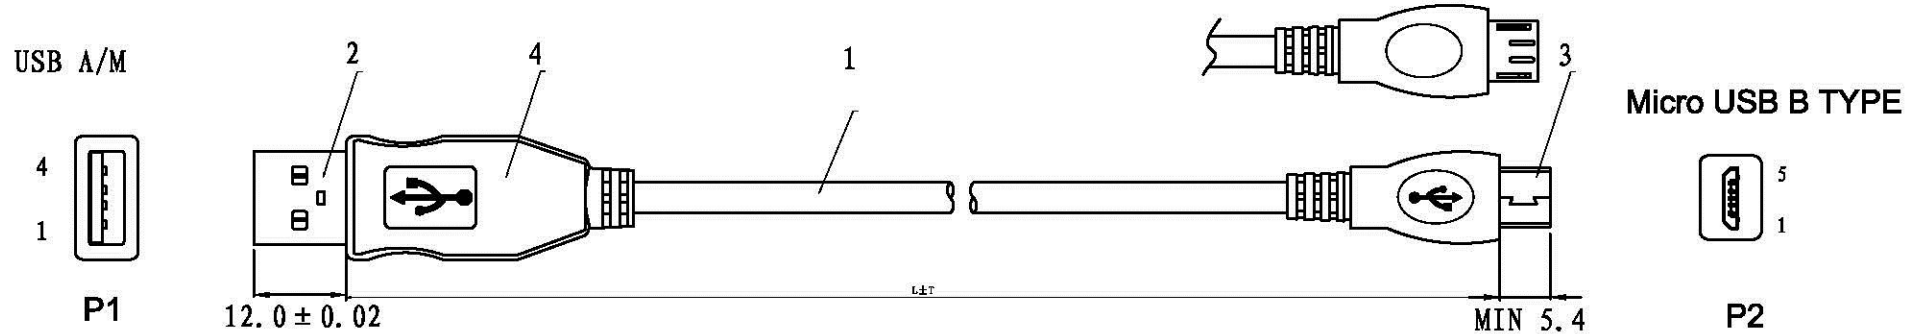

PRODUCT FAMILY		
	L<LENGTH>	T<TOLERANCE>
S3151	0.8M	0.02M
S3152	1.8M	0.03M
S3153	3M	0.05M

PINOUT	
USB A/M	Micro USB B TYPE
P1	P2
1	1 RED
2	2 WHITE
3	3 YELLOW
4	5 BLACK
G	G GROUND

CABLE STRUCTURE

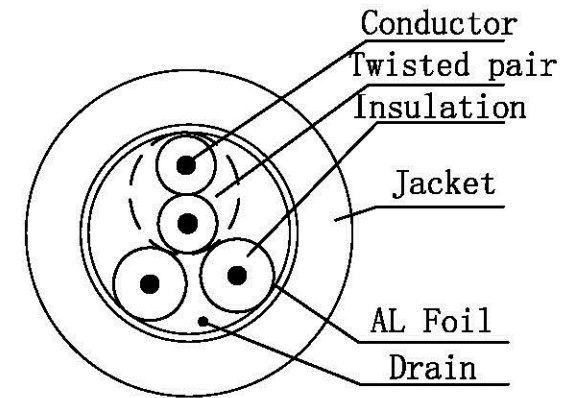

NOTE

- Electrical test:
 - 100% open short and miss wire test;
 - Insulation resistance: DC300V/5s 10Mohm min;
 - Dielectric strength: 150V AC/minute, 1mA.
- Package: Polythene bag
- COLOR: Beige (Pantone #420C)

4		MOLDING	PVC	2	Beige
3		CONN-P2	Micro USB TYPE B	1	NICKEL
2		CONN-P1	USB A/M	1	NICKEL
1		CABLE	(7/0.12CU+PE)*1P+(7/0.12+PE)*2C+AL+PVC OD:4.0MM	1	Beige
NO.	PART NO.	PART NAME	MATERIAL	Q' TY	REMARKS

rotronic		DESCRIPTION	USB CABLE			
			USB A/M-Micro USB(B)			
		Product No.	S3151~S3153			
DRAW	YUAN	CONSUMER				
CHECK		DATE	2008/10/26	REV.	A/0	
APP.		SHEET	1/1	UNIT	mm	SCALE 1:1