



CONFIGURATION DETAILS OF  
UNDIMENSIONED FEATURES  
MAY VARY

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A		2022/08/19	

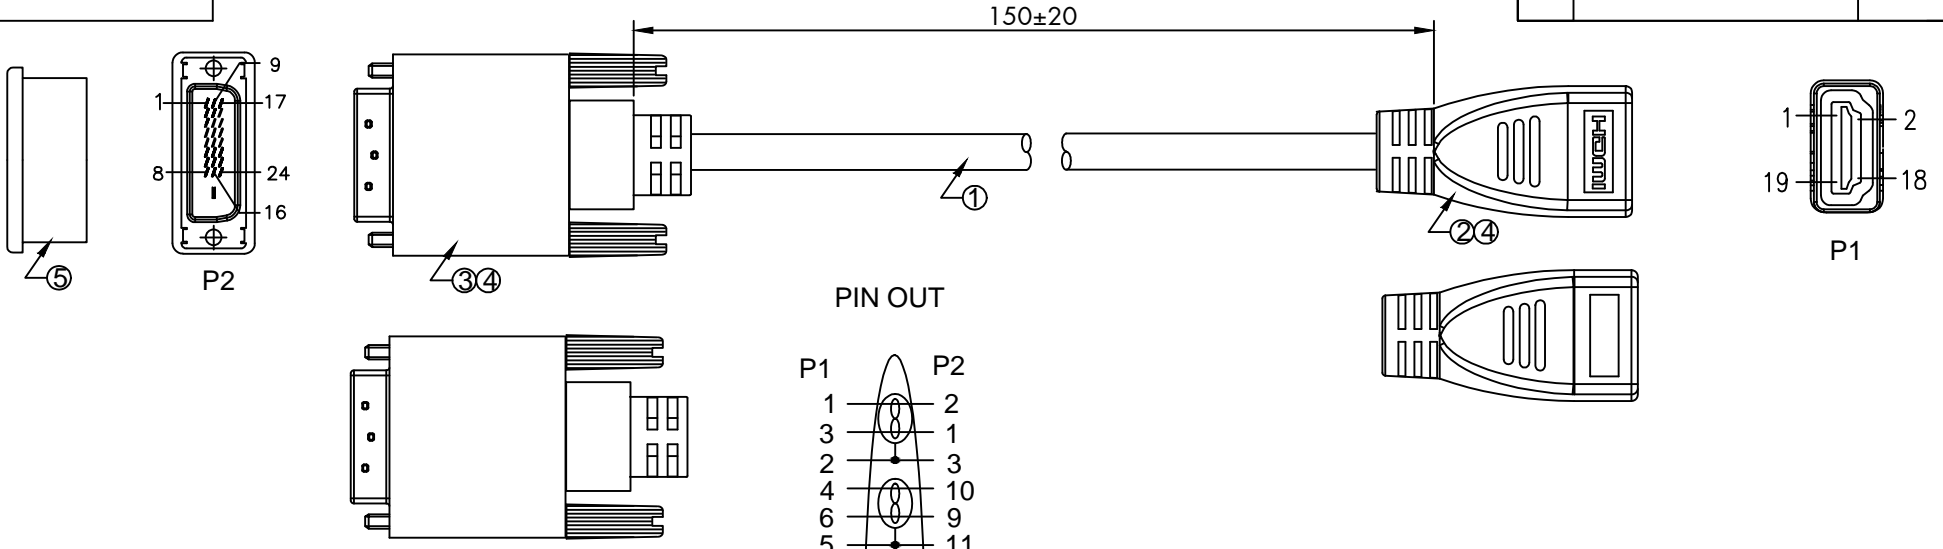

PIN OUT

P1	P2
1	2
3	1
2	3
4	10
6	9
5	11
7	18
9	17
8	19
10	23
12	24
11	22
14	NC
19	16
17	15
13	NC
15	6
16	7
18	14
SHELL	SHELL

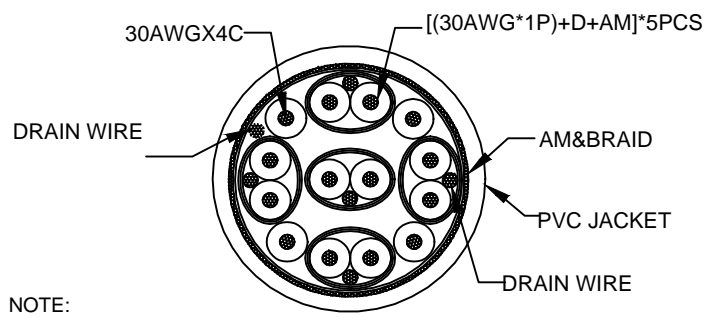

NOTE:  
 1. Electronic test  
 1.1 Open/short 100% test  
 1.2 Insulation resistance: 10MΩ Min  
 1.3 Conductor resistance: 3Ω Max  
 1.4 Hipot: DC 200V/0.01S  
 2. Tested by PC: 1080P@60HZ  
 3. Printing: High Speed Cable 20276 80°C 30V VW-1  
 RoHS2.0(2011/65/EU) AND (2015/863/EU) WITH REACH COMPLIANT

NO.	PART NAME	DESCRIPTION	QUANTITY	REMARKS
5	DUST COVER	TRANSPARENT PE	1	
4	OUTER MOLD	PVC/BLACK	2	
3	DVI 24+1 MALE	DVI 24+1 MALE, GOLD PLATED PIN, NICKEL PLATED SHELL	1	
2	HDMI FEMALE	HDMI A FEMALE, GOLD PLATED PIN, NICKEL PLATED SHELL	1	
1	CABLE	(30AWG/1 BC*1P+AL+MY)*5+30AWG/1 BC*4+AM +E+BRAID/AL-MG, JACKET: PVC/BLACK ,OD6.0±0.2MM	1	

NAME	STANDARD Cableadapter DVI - HDMI, M/F, black		
Item no.	S3219		
<b>SECOMP</b>	MAPE	TOLERANCE	
		X.	±1.00
DRAW BY	SCALE	MM	
	PAGE	1/1	