



MARK	DATE	ECN NO.	DESCRIPTION	REV.	DESIGN
△					

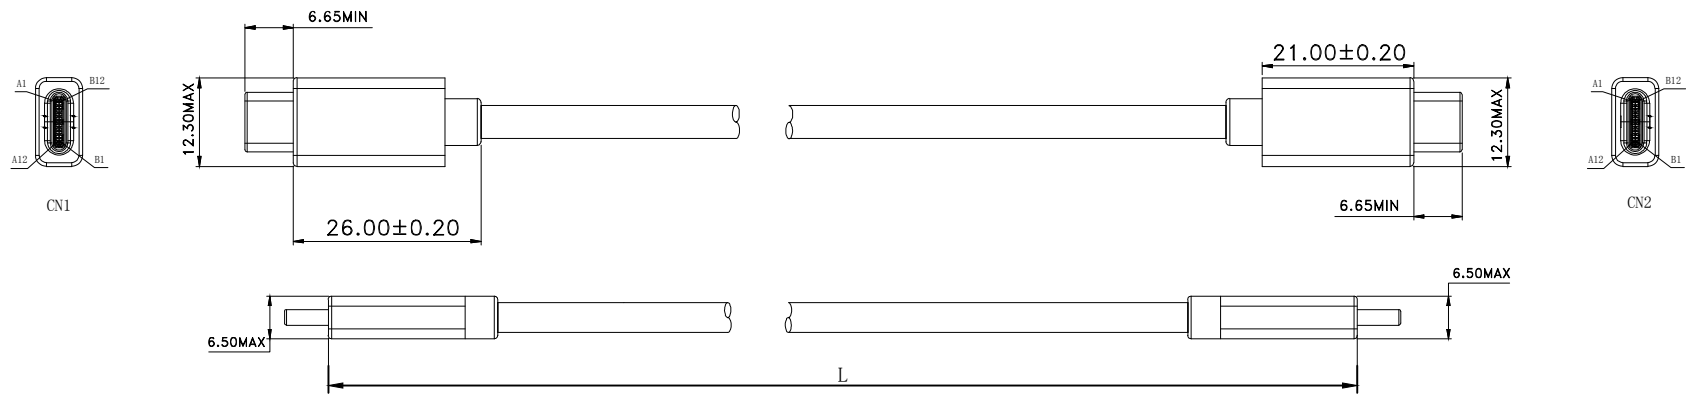

L1=500mm ±20mm #S3520
L2=1000mm ±20mm #S3521

- 备注:
- 1.100% open and short circuit test
 - 2.Voltage test: 100V AC/0.1sec
 - 3.Insulation Resistance: 20Mohm(Min) 100V DC
 - 4.Data transmission:10GBPS
 - 5.Compliant with ROHS and REACH

接线图

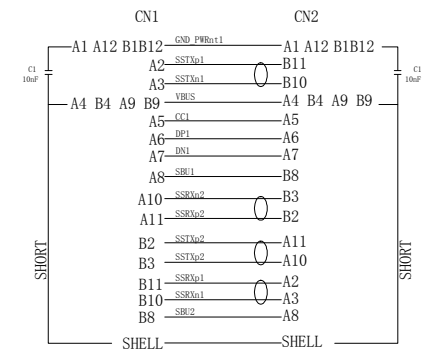

Packaging
1pc/pe bag
10pcs/small box

BOM			
Parts	Qty	Spec	
⑦ Housing	2PCS	ABS	
⑥ Capacitor	2PCS	10nF C0402	
⑤ Cable	1M	(32AWGx1P+EAM)x4+(34AWGx1P)x1+24AWGx2C+32AWGx4C OD:4.6±0.10	
④ TYPE-C SR	1PCS	PVC	
③ YPE-C cable lock	2PCS	PA66	
② E-Marker	1PCS	RT171	
① YPE-C Plug	2PCS	PCB soldering type	

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG	TOL	DIM	TOL
.X	±3.0°	.X	±0.10
.XX	±2.0°	.XX	±0.05
.XXX	±1.0°	.XXX	+0.03

SECOMP					
Drawing#		Date	2017.04.12	Description	STANDARD USB3.1 GEN2 Cable, 20V5A,C-C,M/M
Drawy by		Item No.:	S3520/S3521		
Checked by		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>			
Approved by		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>			
		mm		1:1	
		1/1		1	