

NOTES:

1. MATERIAL

1.1 CABLE(3+9) : [(7/0.12BC+FPE+7/0.12CCS+AM)\*3]  
 +(7/0.12CCS+PVC)\*9+AM+7/0.12CCS+64/0.12ALM+BLACK PVC JACKET.  
 OD:6.0±0.2MM .  
 CABLE PRINTING: " VW-1 80°C 30V LOW VOLTAGE COMPUTER CABLE"

1.2 HDB15 TYPE MALE: SOLDER TYPE, EMPTY 9 PIN,  
 GOLD PLATED CONTACTS AND NICKEL PLATED SHELL, 678PIN SHORT CIRCUIT.


1.3 HOOD MOLDED BLACK PVC.

1.4 THUMB SCREW TO BE MOLDED BLACK PVC.

2. TESTING:100% SHORT AND OPEN TEST.

3. ALL MATERIALS SHOULD BE ROHS ENVIROMANTAL COMPLIANT.

| P/N CHART |             |
|-----------|-------------|
| MODEL     | LENGTH      |
| S3602     | 2000±50MM   |
| S3605     | 10000±150MM |
| S3603     | 3000±70MM   |
| S3604     | 6000±150MM  |

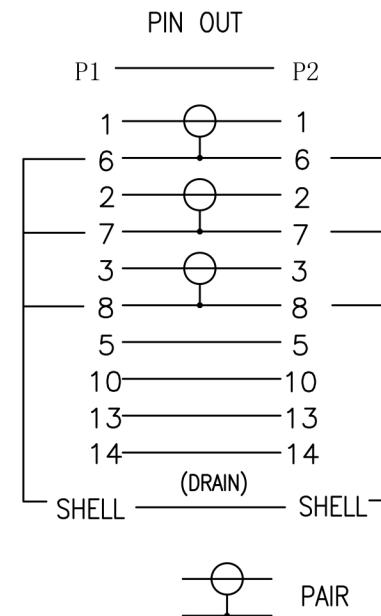

|                         |                       |           |     |
|-------------------------|-----------------------|-----------|-----|
| DIMENSIONAL TOLERANCES: | SIZE: FREE            | CUSTOMER: |     |
|                         | .X ±<br>.X ±<br>.XX ± |           |     |
| REV.:                   | 00                    | PAGE:     | 1/1 |

**SECOMP**

ENG.: SUMIN

PRODUCT NO.:  
VIEW P/N CHART

CUSTOMER NO.:  
VIEW P/N CHART

CHECKED:

DRAWING NO.:  
HF2869

PRODUCT DESCRIPTION:  
HDB15M/HDB15M NICKEL-PLATED

APPROVED:

|      |                    |            |
|------|--------------------|------------|
| 00   | NEW ISSUE          | 2021-03-03 |
| REV. | MODIFY DESCRIPTION | DATE       |