

NOTE:

1. MATERIALS:

1.1 CABLE: [(7/0.12BC+FPE+7/0.12BC+FAM)*3]
 +(7/0.12BC+PVC)*4+AM+7/0.12BC+128/0.12ALM+BLACK PVC JACKET.

OD:8.2±0.2MM .

CABLE PRINTING: " VW-1 80°C 30V LOW VOLTAGE COMPUTER CABLE"

1.2 HDB15 TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, EMPTY 9 PIN, GOLD PLATED CONTACTS AND NICKEL PLATED SHELL.

1.3 ALL HOODED: BLACK PVC.

1.4 SCREW: NICKEL PLATED, HOODED BLACK PVC,

2. TESTING: 100% OPEN AND SHORT TEST.


CONDUCT RESISTANCE: 7 Ω INSULATION RESISTANCE: 5M Ω

H-V: DC300V/0.01S.

3. PACKING: 1PC/PE BAG.

4. ALL MATERIAL SHOULD BE ROHS ENVIRONMENTAL COMPLIANT.

PIN OUT

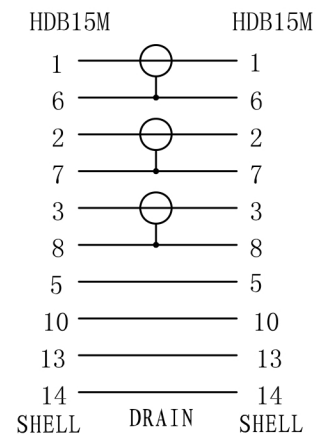

P/N CHART	
MODEL	LENGTH
S3606	15000±200MM
S3607	20000±300MM

DIMENSIONAL TOLERANCES:	SIZE: FREE	CUSTOMER:	
	UNIT: mm		
	REV.: 00		
X. ±		PAGE: 1/1	
.X ±			
.XX ±			

		ENG.: SUMIN
		CHECKED:
PRODUCT NO.: VIEW P/N CHART	CUSTOMER NO.: VIEW P/N CHART	APPROVED:
DRAWING NO.: HF2900	PRODUCT DESCRIPTION: VGA3+4 HDB15M/HDB15M	

00	NEW ISSUE	2011-10-24
REV.	MODIFY DESCRIPTION	DATE