


NOTES:

1. MATERIAL

- 1.1 CABLE(3+9) : [(7/0.12BC+FPE+7/0.12CCS+AM)*3]
 +(7/0.12CCS+PVC)*9+AM+7/0.12CCS+64/0.12ALM+BLACK PVC JACKET
 OD:6.0±0.2MM .
 CABLE PRINTING:" VW-1 80°C 30V LOW VOLTAGE COMPUTER CABLE"
- 1.2 HDB15 TYPE MALE: SOLDER TYPE, EMPTY 9 PIN,
 GOLD PLATED CONTACTS AND NICKEL PLATED SHELL, 678PIN SHORT CIRCUIT.
- 1.3 HOOD MOLDED BLACK PVC.
- 1.4 THUMB SCREW TO BE MOLDED BLACK PVC.
- 1.5 FERRITE CORE (∅12*7.3*15MM) TO BE

- 2. TESTING:100% SHORT AND OPEN TEST.
- 3. PACKING:1PC/PE BAG+LABLE.
- 4. ALL MATERIALS SHOULD BE ROHS ENVIROMANTAL COMPLIANT.

P/N CHART	
MODEL	LENGTH
S3616	3000±70MM
S3618	10000±150MM
S3615	2000±50MM
S3617	6000±150MM

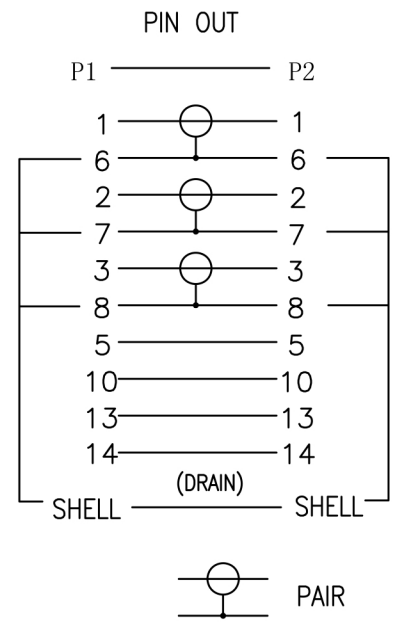

DIMENSIONAL TOLERANCES:			SIZE: FREE	CUSTOMER:			SECOMP			ENG.: SUMIN
X. ± .X ± .XX ±			UNIT: mm							PRODUCT NO.:
00	NEW ISSUE	2021-03-03	X' ±3' .X' ±1'				REV.: 00	DRAWING NO.: HF2870		PRODUCT DESCRIPTION: HDB15M/HDB15M NICKEL-PLATED
REV.	MODIFY DESCRIPTION	DATE		PAGE: 1/1						