

1. MATERIALS:

1.1 CABLE: [(7/0.12TC * 1C + 7/012BC + AM) * 3COAX + 7/0.10BC * 4 +AM + 7/0.12BC + 80/0.12ALM + BLACK PVC JACKET

OD:6.0±0.15MM

CABLE PRINTING: VW-1 80°C 30V LOW VOLTAGE COMPUTER CABLE

1.2 HD15 TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, EMPTY 9, GOLD PLATED CONTACTS, NICKEL PLATED SHELL, 6. 7. 8 PIN SHORT CIRCUIT


1.3 HOOD MOLDED BLACK PVC

1.4 THUMB SCREW TO BE MOLDED BLACK PVC

1.5 FERRITE TO BE MOLDED BLACK PVC

2. TESTING: 100% SHORT AND OPEN TEST

PIN OUT

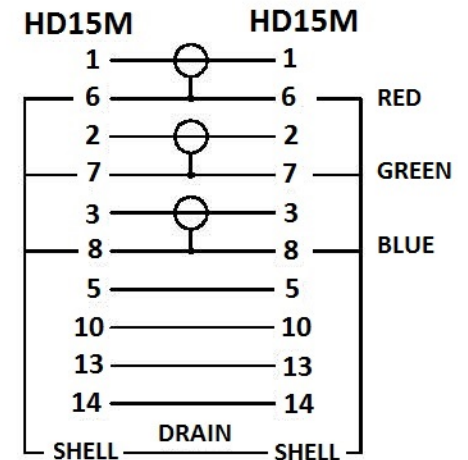

MODEL	LENGTH
S3615	2000±50 mm
S3616	3000±70 mm
S3617	6000±150 mm
S3618	10000±150 mm

DIMENSIONAL TOLERANCES:	SIZE: FREE	CUSTOMER: ROTRONIC	
	X ±		UNIT: mm
	.X ±		
.XX ±	REV.: 00	PAGE: 1/1	

SECOMP

PRODUCT NO.: S3615, S3616, S3617, S3618

ENG.: SUMIN

CHECKED:

00	NEW ISSUE	2016-5-25
REV.	MODIFY DESCRIPTION	DATE

DRAWING NO.: 1397
 DESCRIPTION: STANDARD SVGA Cable, with Ferrites, HD 15 M/M, black