

NOTE:

1. MATERIALS:

1. 1 CABLE: [(7/0.12BC+FPE1.5+7/0.12BC+FAM)*3+(7/0.12BC+PVC)
*4+AM+7/0.12BC+128/0.12ALM+BLACK PVC JACKET.

OD: 8.2 ± 0.2 MM .

CABLE PRINTING: " VW-1 80°C 30V LOW VOLTAGE COMPUTER CABLE"

1. 2 HDB15 TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, EMPTY 9 PIN, GOLD PLATED CONTACTS AND NICKEL PLATED SHELL.

1. 3 ALL HOODED: BLACK PVC.

1. 4 SCREW: NICKEL PLATED, HOODED BLACK PVC,

2. TESTING: 100% OPEN AND SHORT TEST.


CONDUCT RESISTANCE: 9Ω INSULATION RESISTANCE: $5M \Omega$

H-V: DC300V/0.01S.

3. PACKING: 1PC/PE BAG.

4. ALL MATERIAL SHOULD BE ROHS ENVIRONMENTAL COMPLIANT.

PIN OUT

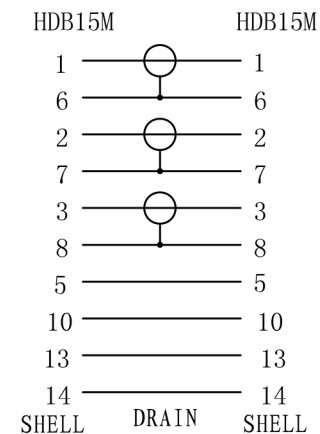

P/N CHART	
MODEL	LENGTH
S3619	15000 ± 200 MM
S3620	20000 ± 300 MM

DIMENSIONAL TOLERANCES:	SIZE: FREE	CUSTOMER:		
	X. \pm			UNIT: mm
	.X \pm			
.XX \pm	REV.: 00	PAGE: 1/1		

		ENG.: SUMIN
		CHECKED:
PRODUCT NO.: VIEW P/N CHART	CUSTOMER NO.: VIEW P/N CHART	APPROVED:
DRAWING NO.: HF2899	PRODUCT DESCRIPTION: VGA3+4 HDB15M/HDB15M	

00	NEW ISSUE	2021-05-19
REV.	MODIFY DESCRIPTION	DATE