


**1. MATERIALS:**

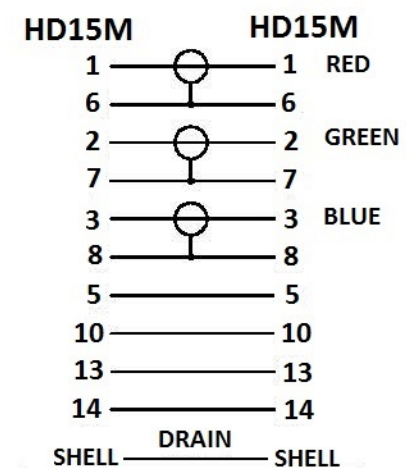

- 1.1 CABLE: [ (7/0.12TC + FPE1.5 + SP(30/0.10TC) + PVC2.5) \*3 COAX + (7/0.12TC + PVC) \*4 + AM + 7/0.16TC + 128/0.12ALM + BLACK PVC JACKET  
OD:8.2±0.2 MM  
CABLE PRINTING: VW-1 80°C 30V LOW VOLTAGE COMPUTER CABLE
- 1.2 HD15 TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, EMPTY 9, GOLD PLATED CONTACTS, NICKEL PLATED SHELL
- 1.3 HOOD MOLDED BLACK PVC
- 1.4 THUMB SCREW TO BE MOLDED BLACK PVC
- 1.5 FERRITE TO BE MOLDED BLACK PVC

**2. TESTING: 100% SHORT AND OPEN TEST**

**PIN OUT**



MODEL	LENGTH
S3619	15000±200 mm
S3620	20000±300 mm

DIMENSIONAL TOLERANCES: X ± .X ± .XX ±	SIZE: FREE	CUSTOMER: ROTRONIC			
	UNIT: mm				
	REV.: 00	 			
00	NEW ISSUE	2016-5-25	X ±3'	REV.: 00	PAGE: 1/1
REV.	MODIFY DESCRIPTION	DATE	X ±1'	00	

**SECOMP**

PRODUCT NO.:	S3619, S3620	ENG.:	SUMIN
DRAWING NO.:	1397	CHECKED:	
DESCRIPTION:		STANDARD SVGA Cable, with Ferrites, HD 15 M/M, black	