


UNIT MM

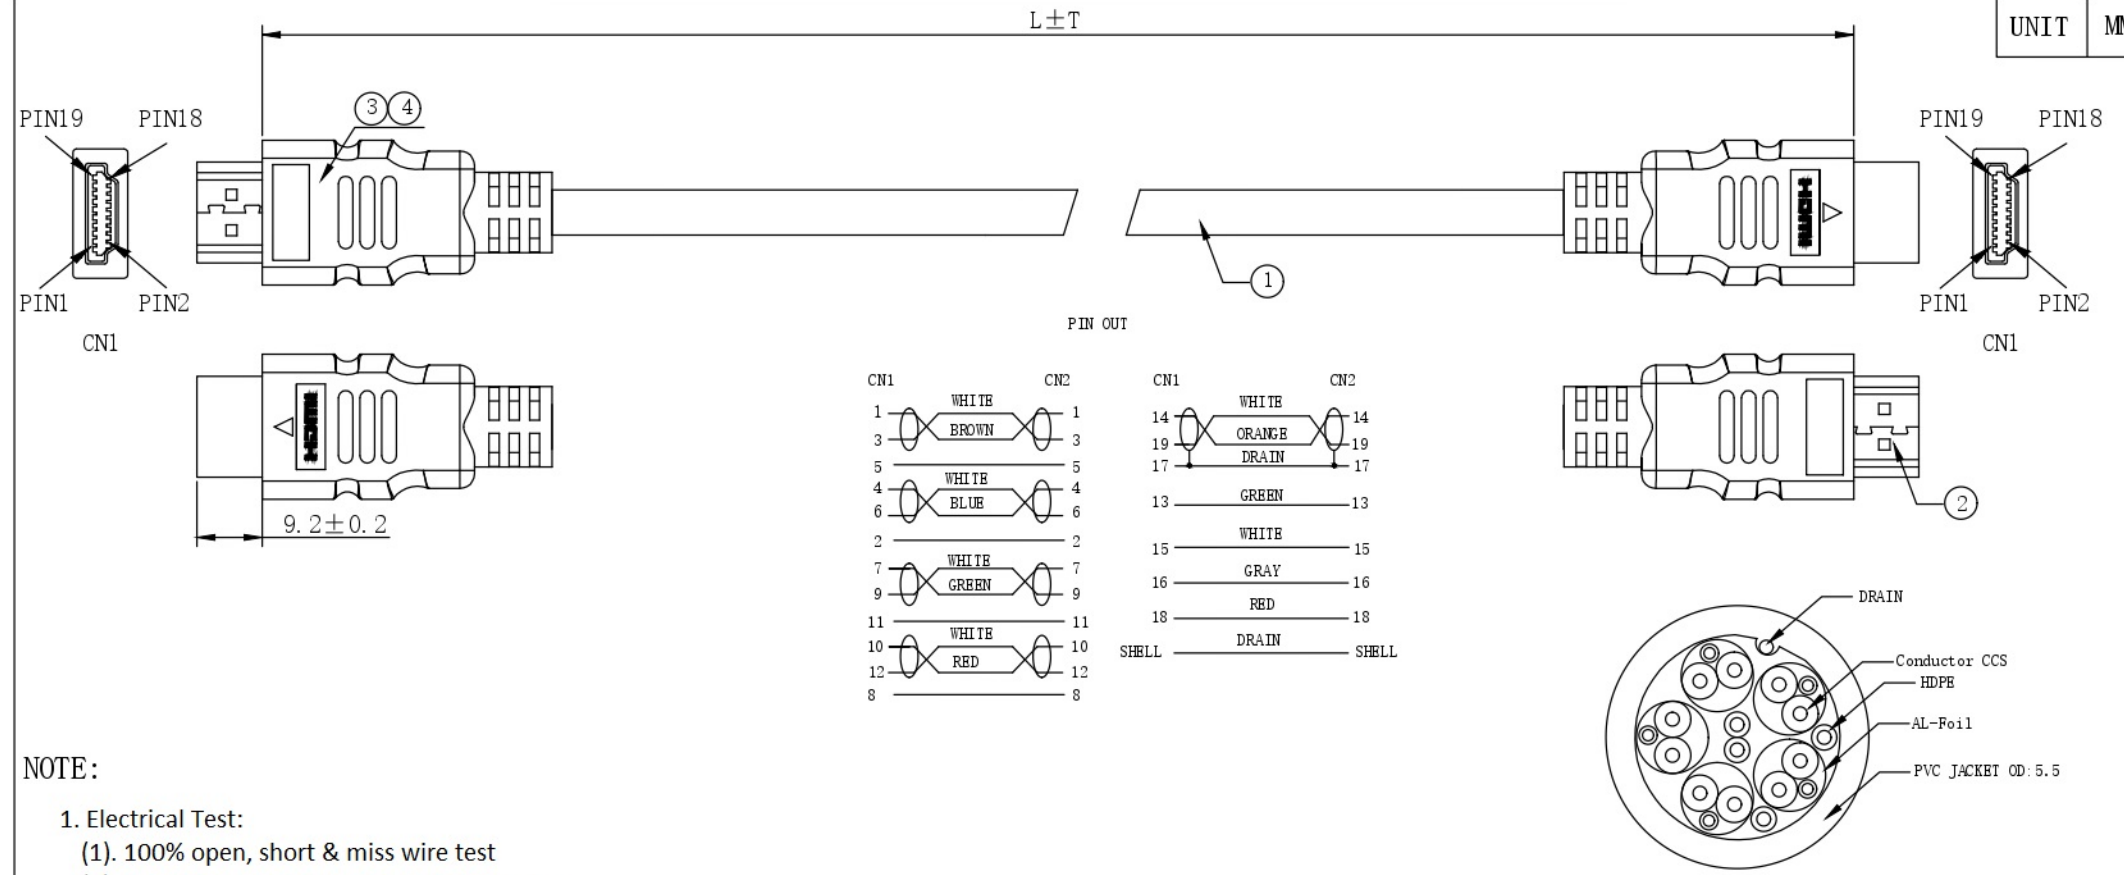

NOTE :

- Electrical Test:
 - 100% open, short & miss wire test
 - Insulation resistance: DC 300V 10M ohm
 - Contact resistance: 6 ohm
 - HD-TV Test 3840 x 2160@120 Hz or 7680 x 4320@60Hz
- RoHS and REACH compliant

MATERIAL LIST :

| NO. | PARTS NAME | SPECIFICATION STANDARD | Q'ty | REMARK |
|-----|----------------|---|------|--------|
| ④ | OUTER MOLD | PVC 88A Black | 2 | |
| ③ | INNER MOLD | LD-PE | 2 | |
| ② | HDMI Connector | 19P A/M Crimping Type The Pin Gold Plated, The Shell Gold Plating | 2 | |
| ① | CABLE | HDMI2.1 Cable (30AWG CCS*1P+E+A+MYLAR)*5+30AWG CCS*4C+AE PVC/Black OD:5.5±0.2mm | 1 | |

| Item No. | Length |
|----------|--------------|
| S3706 | 1000 ± 30 mm |
| S3707 | 2000 ± 50 mm |
| S3708 | 3000 ± 70 mm |

| Desc. | STANDARD HDMI 8K Cable, M/M, black |
|-------|------------------------------------|
|-------|------------------------------------|

| NO. | PARTS NAME | SPECIFICATION STANDARD | Q'ty | REMARK |
|-----|------------|-------------------------------|------------|--------|
| | | | | |
| | | NEW | 2022-09-29 | A |
| BY | CHK | REVISION RECORD MODIFICATIONS | DATE | REV. |

SECOMP