


Structure Diagram

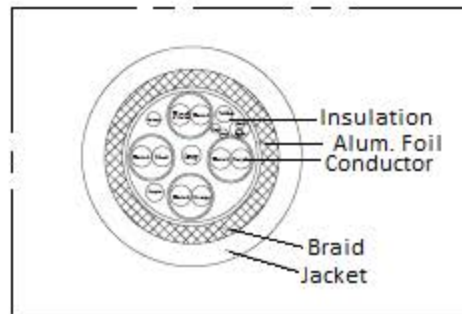

CN.1 PIN ASSIGNMENT:

CN.1 Type-C	CN.2 PCB
GND	GND
A11	A11
A10	A10
B2	B2
B3	B3
A2	A2
A3	A3
B10	B10
B11	B11
A8	A8
B8	B8
B5	B5
A5	A5
A6	A6
A7	A7
VC	VC

- 100% Open and Short circuit test
- Support TV 4K2K @30Hz
- RoHS & REACH compliant

7	(7/0.08TC*1P+AL+HM)*4C+7/0.08TC*1P+7/0.08TC*4C+7/0.20TC*2C+ AB16/6/0.12MM (AL-Mg Wire OD: 4.8±0.2MM)	
6	Black PVC (40P)	10g
5	DP housing SR	1pc
4	Type-C Black Molding	1pc
3	Type-C Nickel Plated Plug	1pc
2	DP Black Housing (ABS)	1pc
1	DP Nickel Plated Plug	1pc

Item No.	Length	Tolerance
S3732	1000mm	20mm
S3733	2000mm	20mm

SECOMP		Item No.	S3732, S3733
		Edition: A/0	
STANDARD Type C to DP converter Cable, M/M, black		Scale: /	Unit: mm
Approved by:	File number:	Sheet: A4	
	Checked by: Jason	Designed by:	