


WIRE ADDRESS

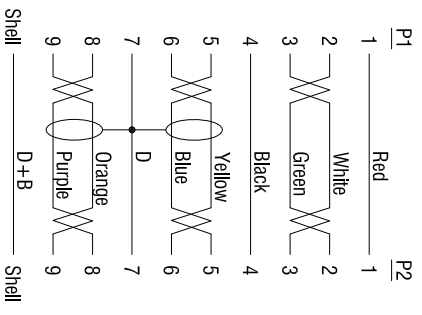

- Electrical Test:**
1. 100% TEST OPEN SHORT MIS-WIRE.
 2. CONTACT RESISTANCE:3Ω MAX.
 3. INSULATION RESISTANCE:5MΩ MIN.
 4. HI-POT:300V DC/10MS.
 5. SUPPORT USB 3.2 GEN1 5Gbps

D	45P PVC BLACK	6
C	USB B MALE(Blue Insulator, Shell Nickel Plated, Pin Gold Plated 30U ^m)	1
B	USB A MALE(Blue Insulator, Shell Nickel Plated, Pin Gold Plated 30U ^m)	1
A	UL2725 OR UL20276 (28AWG*1P+EAM)*2C+28AWG*1P+24AWG*2C+AEB, OD=5.5mm, BLACK PVC JACKET.(8C Wire)	1
PRODUCT SPECIFICATIONS		Quantity
NUMBER	1	Unit

VER.A	REVISE	DATE
D		
C		
B		

USB 3.2 Gen 1 Cable, A - B, M/M, black, 1.8 m	
Item	11.02.8870
Draw	Sam Date: 2014.12.05
Approval	
Duty	F16 BOM.NO: 13413
Sample NO.	Drawings of 1 (1) Proportion: 1:1 Unit(mm) A4

