


**Electric Test:**

- 1.No open,short circuit, wrong connection,poor insulation.
- 2.Contact Resistance: 3Ω MAX
- 3.Insulation Resistance: 5MΩ MIN
- 4.Electric Voltage: DC 300V
- 5.Data Transfer: 10Gbps MAX
- 6.PD: 85W MAX

**Specification :**

1. Cable [1P(28AWG)+AL+HM]\*4 + 1P(32AWG) + 4C(34AWG)+2C(25AWG) +4D+PTFE+S, Jacket: Black PVC, OD: 5.10mm
2. Conn. USB Type C Plug, with E-mark IC, Conductor: Gold Plated, Shell: Nickel Plated
3. Inner Molding LDPE
4. Outer Molding Black PVC: 35P

**WIRE TABLE**

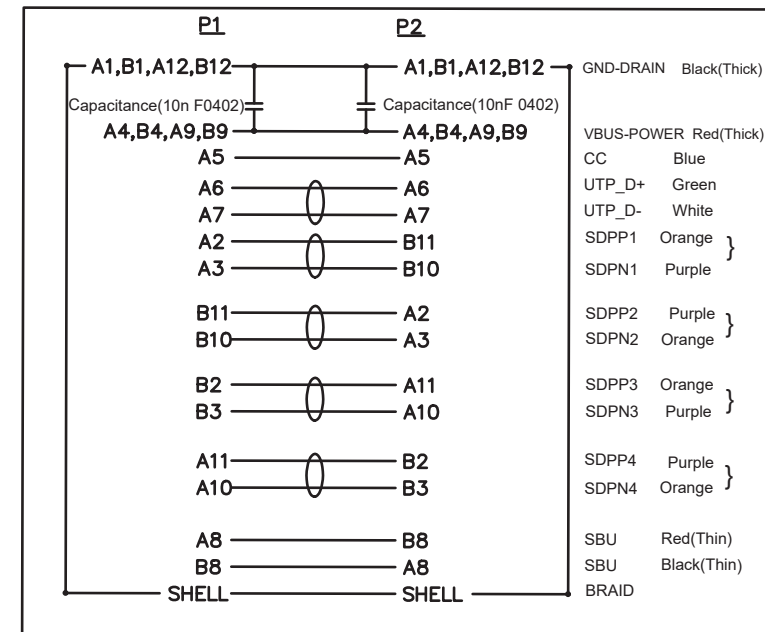

Product Name	ROLINE USB3.2 Gen2 Cable, C-C, M/M, 7m, black
Product No.	11.02.9067

Approve	Check	Draw	Design	Rev.	Date	Contents of Change	Design
Allen	Allen	Oswald	Oswald	1			
				2			
				3			
Scale 1:1 Unit : mm							

Issue Date : 2024/8/7