



2000+30/-0mm

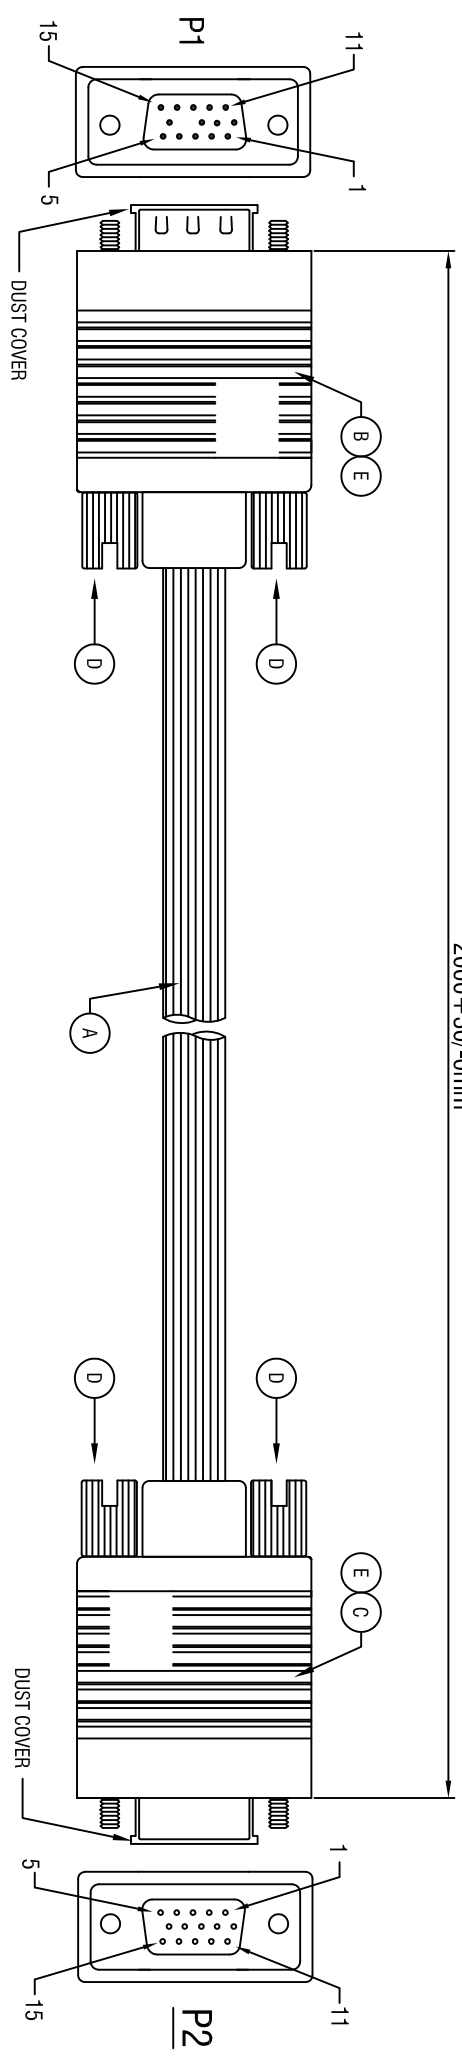

WIRE ADDRESS

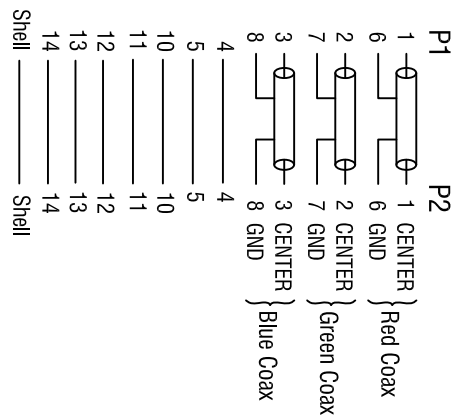

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:3Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 1280*1024.
 - 6.Real Test Not Twinkling, Double Vision and Decolor.

E	45P BLACK PVC	ROLINE HQ VGA Cable, HD15 M - HD15 F, 2.0m	
D	HD37.7 Screw	Item 11.04.5302	
C	HDB15P FEMALE (PIN9 OUT, Black Insulator Nickel Plated)	Draw <i>Make</i> Date: 2020.05.13	
B	HDB15P MALE (PIN9 OUT, Black Insulator Nickel Plated)	Approval	
A	UL2919,28# 3COAX+28#*7C+ADB, OD=8.0mm BLACK DENTATE PVC JACKET.	Duty F16 BOM.NO.:13914	
F	NUMBER	PRODUCT SPECIFICATIONS	Sample NO. _____ Drawings of 1 (2) Proportion: 1:1 Unit(mm) A4