


WIRE ADDRESS

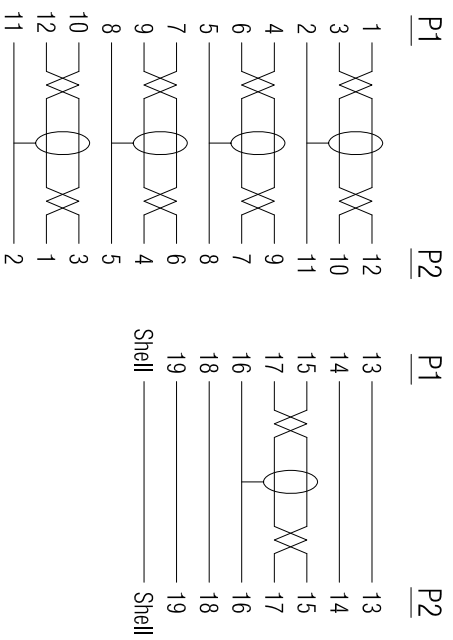

ITEM NO	L(mm)	T(mm)
11.04.5604	7500	+100/-0mm
11.04.5605	5000	+50/-0mm
11.04.5609	10000	+100/-0mm

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:3Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 3840*2160P 30HZ.
 - 6.Real Test Not Twinkling,Double Vision and Decolor.

D		45P BLACK PVC	g		ROLINE DisplayPort Cable; DP M - DP M		
C		DP MALE SHELL(ABS BLACK)	2		Item 11.04.5604~11.04.5609		
B		DP MALE(Black Insulator,Nickel Plated)	2		Draw <i>Mako</i> Date: 2020.01.16		
A		UL20276[28#*1P(BC)+D+AM]*5+28#*5C(BC)+AEB(AM),OD=7.3mm,BLACK COLOR JACKET.	1		Approval		
F		PRODUCT SPECIFICATIONS		Duty F16		BOM.NO:	
NUMBER		1		Quantity		Unit	
1		2		4		Sample NO.	
						Drawings of 1 (1) Proportion: 1:1 Unit(mm) A4	

