


3000 + 50/0mm

WIRE ADDRESS

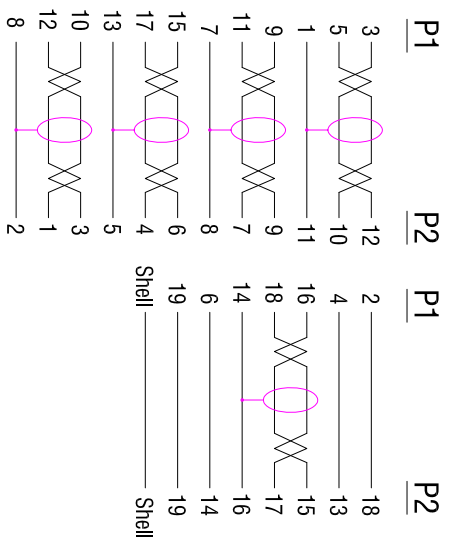

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:3Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 3840*2160P 60Hz.
 - 6.Real Test Not Twinkling,Double Vision and Decolor.

| | | |
|------------------------|--|---------------|
| E | 45P BLACK PVC | G |
| D | DisplayPor 20P MALE BLACK ABS SHELL | G |
| C | Mini DP MALE(White Insulator, Nickel Plated) | PCS |
| B | DisplayPor 20P MALE(Black Insulator, Nickel Plated) | PCS |
| A | UL20276 (32AWG*1P+D+AM)*5+32AWG*5C+AEB,OD=6.0mm,BLACK PVC JACKET.(BC Wire) | PCS |
| PRODUCT SPECIFICATIONS | | Quantity Unit |
| NUMBER | 1 | 4 |

| | |
|--|-----------------------|
| ROLINE DisplayPort Cable, DP M - Mini DP M, 3m | |
| Item | 11.04.5636 |
| Draw | Kobe Date: 2014.12.05 |
| Approval | |
| Duty | F16 BOM.NO: 10377 |
| Sample NO. | |
| Drawings of 1 (1) | Proportion: 1:1 |
| Unit(mm) | |
| SECOMP | |
| A4 | |