


WIRE ADDRESS



- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:3Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 3840*2160P 60Hz.
 - 6.Real Test Not Twinkling,Double Vision and Decolor.

E	45P PVC BLACK		G		
D	DP 20P MALE SHELL(BLACK ABS)	1	PCS	DisplayPort Cable, DP - Mini DP, M/M, 1.5m	
C	Mini DP 20P MALE(White Insulator, Nickel Plated)	1	PCS	Item	11.04.5638
B	DP 20P MALE(Black Insulator, Nickel Plated)	1	PCS	Draw	<i>Yake</i> Date: 2017.11.24
A	UL20276 (32AWG*1P+D+AL/MY)*5PCS +32AWG*5C+AEB(AM BRAID), OD:6.0mm BLACK PVC JACKET	1	PCS	Approval	
F	NUMBER	PRODUCT SPECIFICATIONS		Duty	F16
	1	2		Quantity	BOM.NO:13157
		4		Unit	
				Sample NO.	
				Drawings of 1 (1)	Proportion: 1:1
				Unit(mm)	
					A4

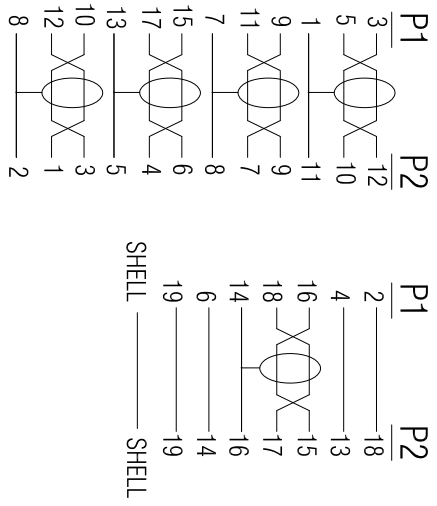