



Datenblatt - Fiche technique - Data sheet


11.04.5649



ROLINE GOLD DisplayPort Kabel, DP ST - ST, 10,0 m

ROLINE GOLD Câble DisplayPort DP M - DP M, 10,0 m


ROLINE GOLD DisplayPort Cable, DP-DP, M/M, 10.0 m

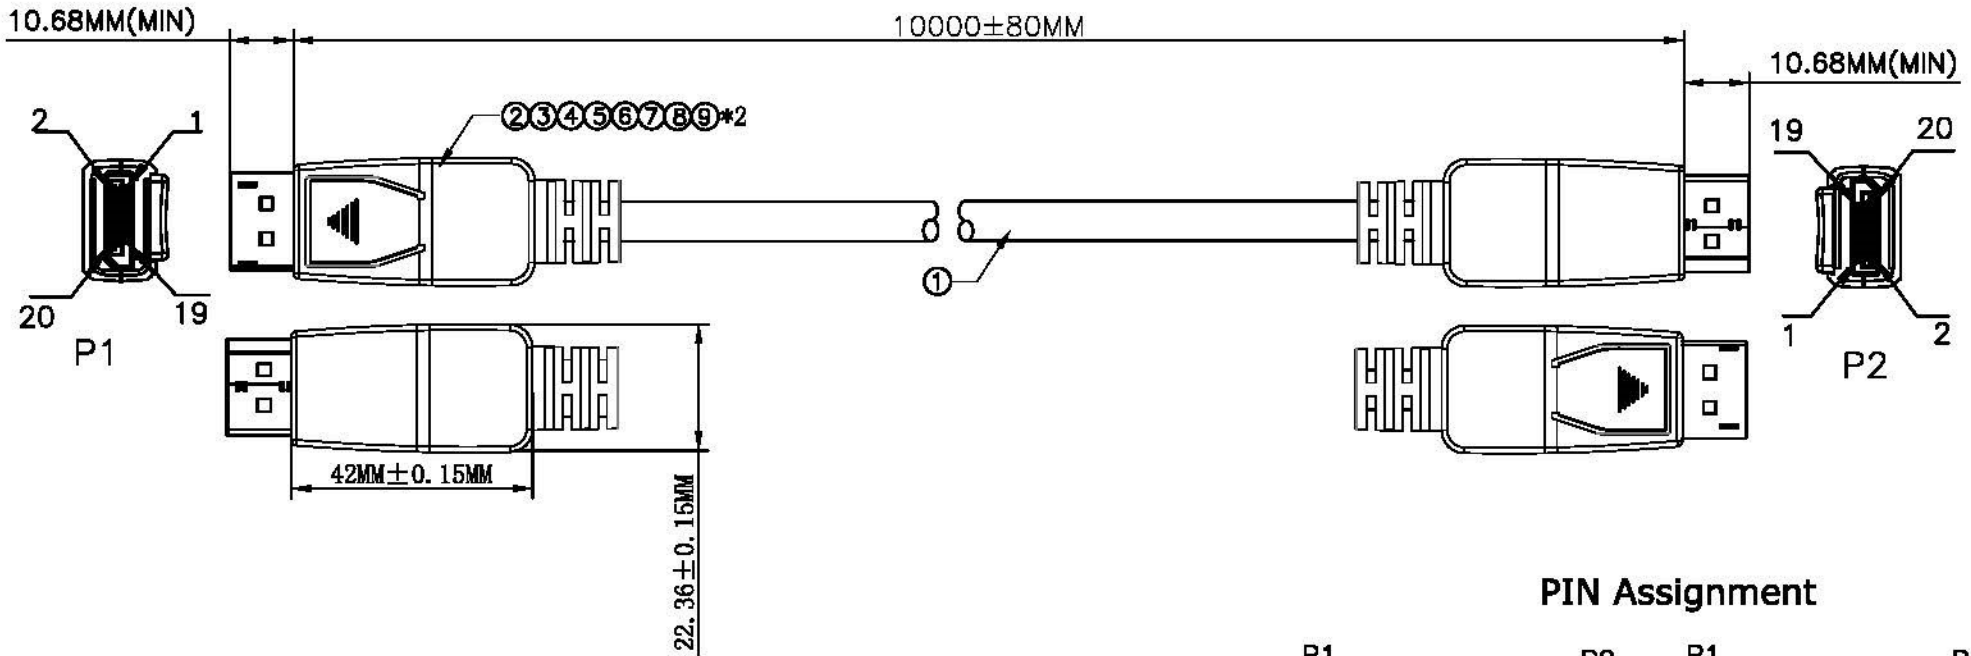

ELECTRICAL TEST:

1. 100% OPEN SHORT SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 2 OHM (MAX)
3. INSULATION RESISTANCE: 10M OHM (MIN)
4. HI-POT TEST: DC 300V/10ms

PIN Assignment

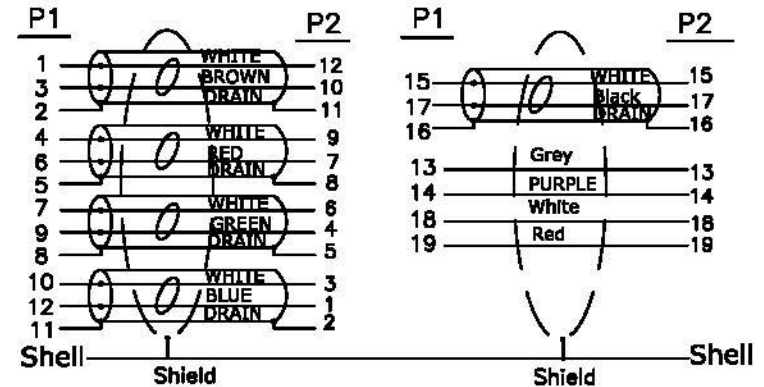

NO	DESCRIPTION	Q'TY	UNIT
9	black heat shrinkable casing ~ ϕ 1.5MM	0.04	m
8	black heat shrinkable casing ~ ϕ 1.0MM	0.1	m
7	black heat shrinkable casing ~ ϕ 2.5MM	0.1	m
6	DisplayPort (DP1688#) M UP Shell ~ fine lines on the surface to ABS material to electroplating golden shell	2	pcs
5	DisplayPort (DP1688#) M DOWN SHELL ~ appearance of fine lines to ABS material to electroplating golden shell	2	pcs
4	Transparent PE ROHS LDPE	5	g
3	45P BLACK PVC ROHS	12	g
2	DisplayPort Port M BLACK INSULATION SHELL PLATED: GOLD CONTACT: 3u W/PCB	2	pcs
1	DP ~ UL20276 ~ [26AWG(7/0.16TC)+EAM]*5P+26AWG(7/0.16TC)*5C+AEB(16/8/0.12AL-MG 65% AL) ~ OD: 8.5MM ~ BLACK MARKING: DisplayPort Cable E342987 冗 AWM STYLE 20276 80°C 30V VW-1W/GOLD/BLACK (32/3/0.2MM 3 Shares of gold sinistral without interval)	10.0	m

REV	ECN	DESCRIPTION	DATE	NAME
		TOLERANCE		
		INCHES		
		M/M		
		.X	.015	.30
		.XX	.010	.10
		.XXX	.005	.05
DRAWN BY		ZHWL	Item No.	11.04.5649
CHECK BY			SCALE	NONE
APPD BY			UNIT	MM
			DATE	2016.11.26
			DRAWING NO.:	C04089-00315
			REV.	A01
				1/2