


**ELECTRICAL TEST:**

1. 100% OPEN & SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 2 OHM(MAX)
3. INSULATION RESISTANCE: 10M OHM(MIN)
4. HI-POT TEST: DC 300V/10ms

**WIRE CONNECTION**

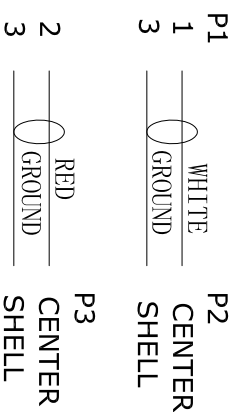

NO	DESCRIPTION	Q'TY	UNIT	REV		ECN	TOLERANCE		DESCRIPTION	DATE	NAME
				INCHES	M/M						
8	heat-shrinkable tubing ~ $\phi$ 2.0MM~BLACK~	0.01	pcs				.X	.30			
7	TRASPARENT PE ROHS LDPE	4	g				.XX	.10			
6	45P RED PVC ROHS	6	g				.XXX	.05			
5	45P WHITE(N-BHC 2001) PVC ROHS	6	g								
4	45P BLACK PVC ROHS	6	g								
3	RCA M SHELL PLATED:NICKEL BLACK INSULATION	2	pcs								
2	DC3.5 M SHELL PLATED:NICKEL THREE TYPE	1	pcs								
1	NO UL [7/0.127TC*1C+S(28/0.10TC)] *2F OD:2.8*2.8MM BLACK PVC	1.5	m								
NO	DESCRIPTION										

DRAWN BY: ZHOUWENLONG  
 CHECK BY:  
 APPD BY:  
 TITLE: ROLINE 3.5mm/ 2XRCA (M) Cable, 1.5m  
 SCALE: NONE  
 UNIT: MM  
 DATE: 2019.10.22  
 P/N: 11.09.4341  
 DRAWING NO.: CA1790167  
 REV. AO 1/1