



Datenblatt - Fiche technique - Data sheet


11.99.5526



VALUE Monitorkabel HDMI High Speed, ST-ST, 1,0 m

VALUE Câble de raccordement pour écran HDMI High Speed M-M, 1,0 m

VALUE HDMI High Speed Cable, M/M, 1.0 m

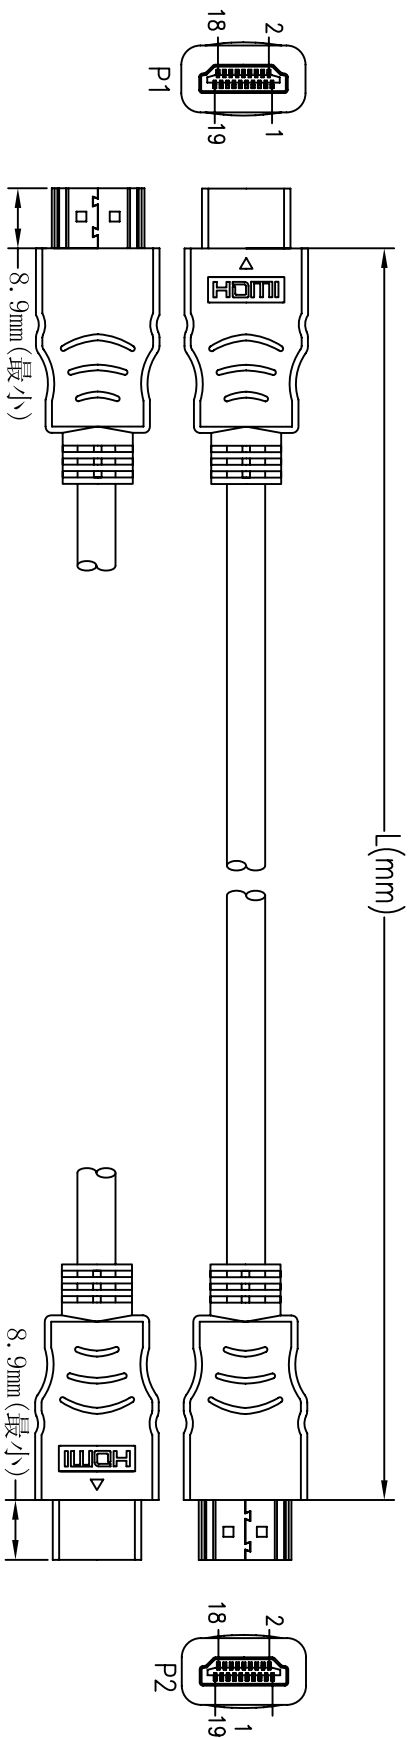

PIN OUT

P1	P2		
1	1	BLUE	RED
3	3	WHITE	
5	5	DRAIN	AM
4	4	BLUE	SILVER
6	6	WHITE	
2	2	DRAIN	AM
7	7	BLUE	BLUE
9	9	WHITE	
11	11	DRAIN	AM
10	10	BLUE	BROWN
12	12	WHITE	
8	8	DRAIN	AM
13	13	GREEN	PURPLE
14	14	PURPLE	
15	15	YELLOW	ORANGE
16	16	ORANGE	
17	17	RED	WHITE
18	18	WHITE	
19	19	BLUE	

P/N表

P/N	L
11.99.5526	1000±30mm
11.99.5527	2000±50mm
11.99.5537	3000±70mm
11.99.5557	5000±70mm

NOTES:

1. MATERIAL

- 1.1 HDMI CABLE: (7/0.1BC*1P+7/0.1CCS+AM)*4PCS+7/0.10CCS*5C+7/0.10CCS*1P +AM+7/0.12CCS+128/0.12ALM+BLACK PVC JACKET.

OD: $\varnothing 6.0 \pm 0.2$ mm

CABLE MARKING: E324703 AWM STYLE 20276 80°C 30V

HIGH SPEED HDMI® CABLE

- 1.2 HDMI TYPE A MALE: BLACK INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
- 1.3 ALL HOOD: MOLDED BLACK PVC.

2. ELECTRICAL

- 2.1 100% OPEN AND SHORT TEST.
- 2.2 CONDUCTOR RESISTANCE: 15 OHMS MAX.
- 2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN.
- 2.4 HDTV-DVD TEST: 1080P.

3. PACKAGING: A PC/PE-BAG.
4. ALL MATERIALS ARE ROHS & REACH COMPLIANT.

SECCOMP

PRODUCT NO:

CUSTOMER NO:

ENG: Zhy

CHECKED: Yiko

DRAWING NO:

PRODUCT DESCRIPTION:

HDMI AM/AM/NICKEL-PLATED

APPROVED: Sally

REV.	MODIFY DESCRIPTION	DATE
00	NEW ISSUE	2016-04-01
1		

LENGTH TOLERANCE:	SCALE:
X. ± 0.5	FREE
.X ± 0.2	
.XX ± 0.1	

ANGLE TOLERANCE:	UNIT:	CUS. NAME:
X° $\pm 3'$	mm	
.X° $\pm 1'$		

VERSION:	PAGE:
00	1/1

PRODUCT NO:	PRODUCT DESCRIPTION:
HP2114	HDMI AM/AM/NICKEL-PLATED

ENG:	CHECKED:
Zhy	Yiko

APPROVED:
Sally