



Datenblatt - Fiche technique - Data sheet




11.99.5603



VALUE DisplayPort Kabel, DP ST - ST, 3,0 m

VALUE Câble DisplayPort, DP M - DP M, 3,0 m

VALUE DisplayPort Cable, DP-DP, M/M, 3.0 m

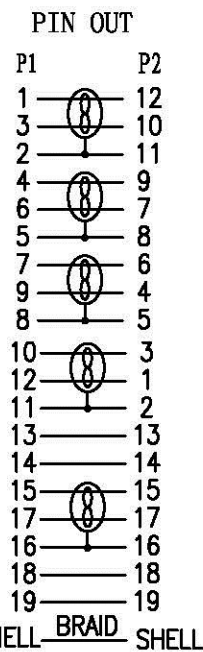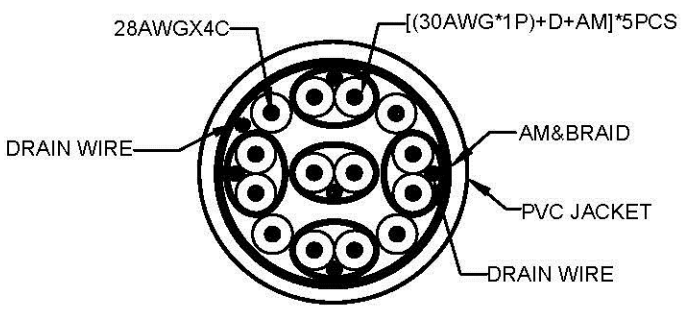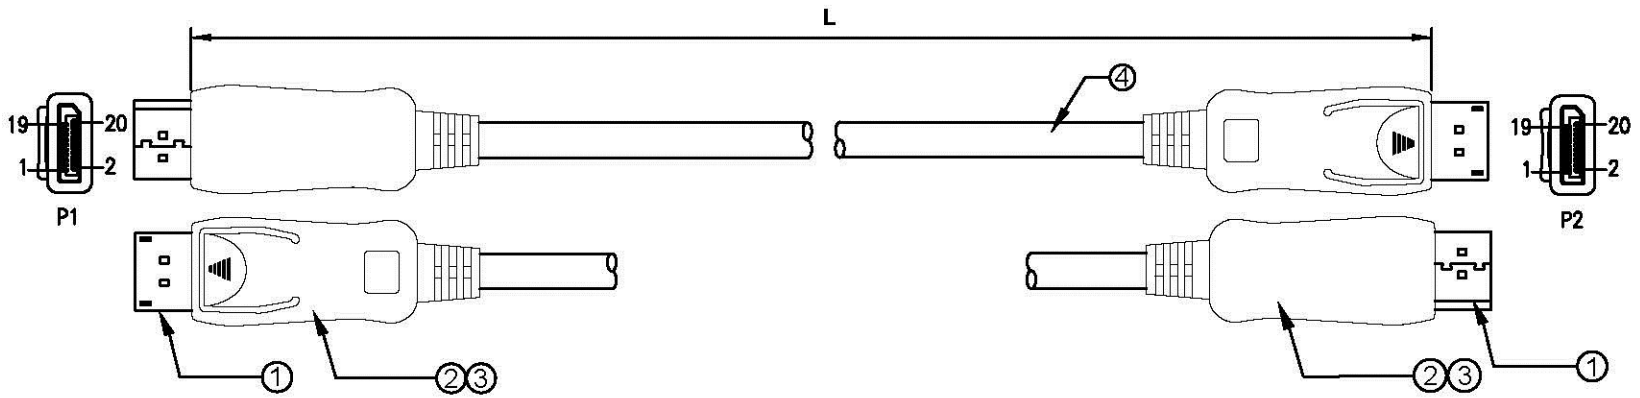

NOTE:

- 1. Electrical properties:**
1. ALL COMPONENTS ARE RoHS COMPLIANT.
 2. 100% OPEN AND SHORT TEST.
 3. CONDUCTOR RESISTANCE: 3 OHMS
 4. INSULATION RESISTANCE: 10 MEGOHMS.
 5. HI-POT: DC200V/0.01S
 6. PC TEST 4K*2K 60Hz PASS 1080P PASS

2. ROHS 2.0 and REACH

MODEL LIST

Model	Length
11.99.5601	1000mm
11.99.5602	2000mm
11.99.5603	3000mm
11.99.5605	5000mm

MATERIAL LIST

No.	PART NAME	DESCRIPTION	QTY	SECOMP				
④	CABLE	(7/0.10BC*1P+7/0.10BC+ AM)* 5PCS+7/0.12BC*4C+AM+7/0.12BC+128/0.12 AL-MG+PVC, OD: 7.3±0.1mm, COLOR: BLACK	L	DRAW No.	NAME	DP CABLE 4K*2K/ 60Hz		
③	OUTER MOLD	BLACK ABS	2	CUSTOMER	MAPE	TOLERANCE		
②	INNER MOLD	LD-PE	2	MODEL No.	11.99.560X-1~5M		X. ±1.00	X.X ±0.50
①	CONNECTOR	DisplayPort MALE , GOLD PLATED PIN, Nickel PLATED SHELL	2	APPROVE BY	CHECK BY	DRAW BY	SCALE	MM
							PAGE	1/1