


RoHS Compliant

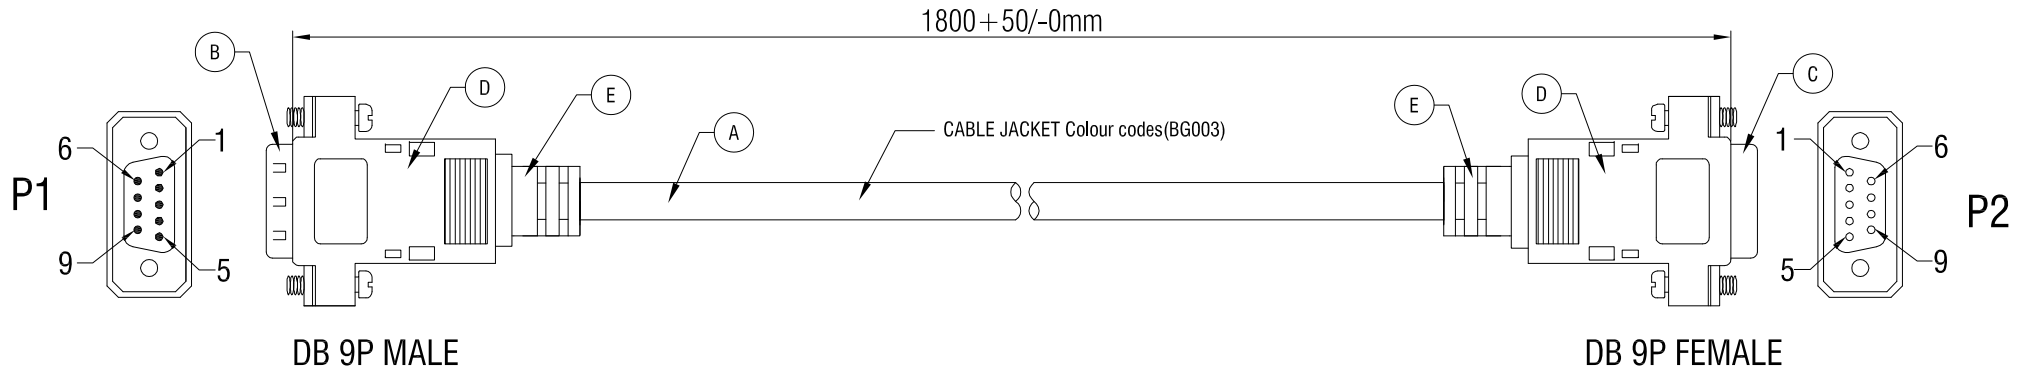

**WIRE ADDRESS**

<u>P1</u>	<u>P2</u>
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
SHELL	SHELL

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
  - 2.CONTACT RESISTANCE:3Ω MAX.
  - 3.INSULATION RESISTANCE:5 MΩ MIN.
  - 4.HI-POT:300V DC/10MS.

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit
E	45P PVC BEIGE(BG003)		G
D	DB9P Assembly shell BEIGE(BG003) + INCH Short Screw	2	PCS
C	DB9P FEMALE(BLACK INSULATOR,SHELL Nickel Plated,PIN Gold Plated)	1	PCS
B	DB9P MALE(BLACK INSULATOR,SHELL Nickel Plated,PIN Gold Plated)	1	PCS
A	NON-UL 30AWG*9C + AE(BC), OD:5.0mm, BEIGE(BG003) PVC JACKET.	1	PCS

VALUE RS-232 cable DB9 M/F assembled, 1.8m			<b>SECOMP</b>
Item	11.99.6218		
Draw	Kobe	Date: 2015.12.07	
Approval			
Duty	F16	BOM.NO:XXXXXX	
Sample NO.			