



Datenblatt - Fiche technique - Data sheet

11.99.8977



VALUE USB 3.0 Kabel, Typ A-A, ST/BU, 0,8m




VALUE Câble USB 3.0 Type A-A, M/F, 0,8 m

VALUE USB 3.0 Cable, A - A, M/F, 0.8 m

ROHS-COMPLIANT

USB 3.0 A/M 9PIN
INS:BLUE(PT 300C)

USB 3.0 A/F 9PIN
INS:BLUE(PT 300C)

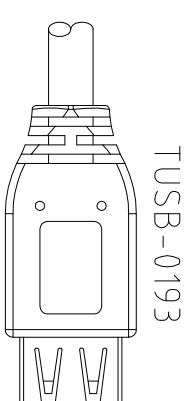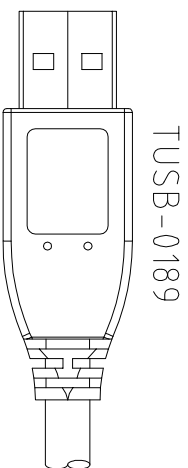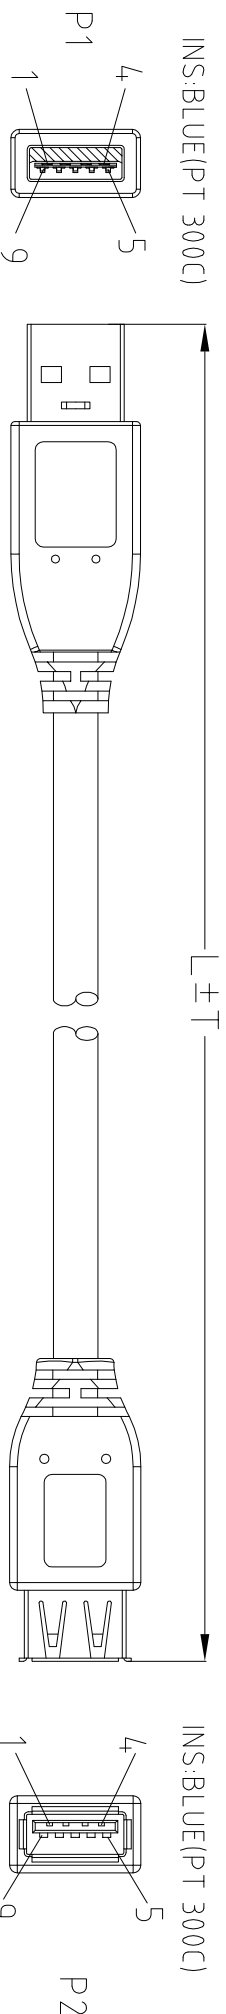

NOTE:

- CABLE: UL-2725 [#28(7/0.127 T.C)×1P INS:Foam-PE+D.W(7/0.127 T.C)
+AL/MY+Hot-melt-MyIar]×2C+#28(7/0.127 T.C)×1P INS:Polyolefin
+#28(7/0.127 T.C)×2C INS:Polyolefin+AL/MY+B.D(85%)
PVC JACKET; OD:5.2±0.15mm COLOR:WHITE(NK-W21) REV 3.0.
- CONNECTOR:
P1: USB 3.0 A TYPE MALE 9PIN CONTACT:30u",SHELL:NI-PLATED.
P2: USB 3.0 A TYPE FEMALE 9PIN CONTACT:30u",SHELL:NI-PLATED.
- HOOD:MOLDED TYPE,PVC 45P, COLOR:WHITE(NK-W21).
- ELECTRICAL TEST:
(1)100% OPEN SHORT & MIS WIRE TEST.
(2)CONTACT RESISTANCE 3 ohm Max.
(3)INSULATION RESISTANCE 10M ohm Min.
- PACKING:EACH PC / POLYBAG.
50 PCS / CARTON

PIN	PIN OUT	P2	CABLE FUNCTION
1	RED	1	PWR
2	WHITE	2	UTP_D-
3	GREEN	3	UTP_D+
4	BLACK	4	GND_PWRrt
5	BLUE	5	SDP1-
6	YELLOW	6	SDP1+
7	D.W	7	SDP1_Drain & SDP2_Drain
8	PURPLE	8	SDP2-
9	ORANGE	9	SDP2+
SHELL		9	SHELL

170-3781-3	11.99.8977	800	10
170-3781-2		3000	30
170-3781-1	11.99.8978	1800	30
DWG	P/N	L(mm)	T(mm)

Tolerance Inch M/M		Title	
X	.015 .30	Customer P/N	
XX	.010 .10	App'd	
XXX	.005 .05	Scale NONE Units M/M Third Angle Projection	
Draw		Dwg No. 170-3782 REF: II Sheet:1/1	
FANNIE 05/03/10'		Customer: T-RAG	
Check		Third Angle Projection	
Engr		Sheet:1/1	

Rotronic co., LTD.

USB 3.0 A/M - A/F CABLE

Customer: T-RAG

App'd
Scale NONE Units M/M Third Angle Projection
Dwg No. 170-3782 REF: II Sheet:1/1