


DisplayPort Female

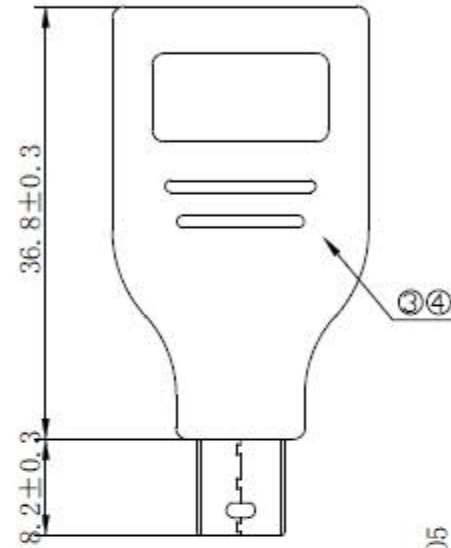


pin out

CN1	CN2	CN1	CN2
02	01	18	02
01	03	13	04
03	05	14	06
05	07	11	08
04	09	10	10
06	11	12	12
08	13	16	14
07	15	15	16
09	17	17	18
19	19	20	20
		SHELL	SHELL

NOTE:

- Electrical test:
  - 100% open short & miss wire test;
  - Insulation resistance:DC 300V 0.01s 10M ohm min;
  - Contact resistance:5 ohm max;
- Output:3840\*2160P @60Hz
- ROHS 2.0 AND REACH COMPLIANT

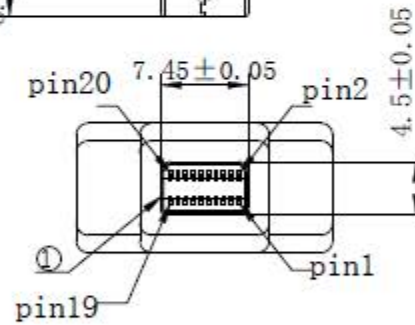

Mini DisplayPort Male

MATERIAL LIST:

④	Moulding	PVC Moulding Black	1	
③	PCB	Mini DP to DP PCB	1	
②	Connector	Display port Female,Black insulation The Pin Gold Plating,the Shell For Nickel plating	1	
①	Connector	Mini Display port male,White insulation The Pin Gold Plating,the Shell For Nickel plating	1	

NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
unit	mm			
		NEW		2019-06-17
BY	CHK	REVISION RECORD MODIFICATIONS		DATE

ITEM NO.	12.99.3161
Colour	black
VALUE Mini DP (v1.2) Adapter, Mini DP-DP, M/F, 4K @60Hz	

**SECOMP**

A  
REV.