



Datenblatt - Fiche technique - Data sheet



**21.15.2776**



ROLINE Patchkabel Kat.6A UTP, Component Level, LSOH, orange, 7,5 m

Cordon ROLINE UTP Cat.6A / 10 Gigabit, Component Level, LSOH, orange, 7,5  
m

ROLINE UTP Patch Cord Cat.6A, Component Level, LSOH, orange, 7.5 m

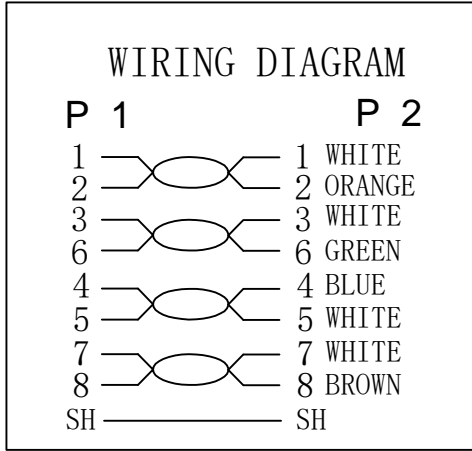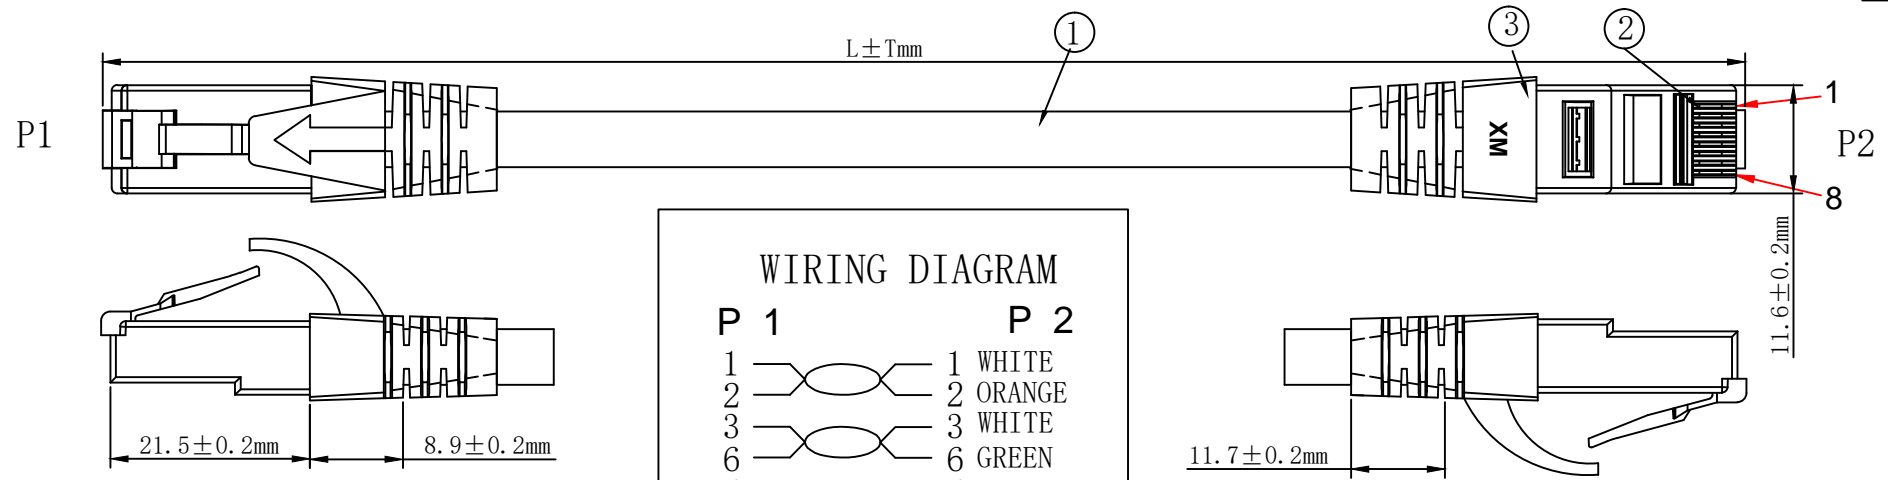

**1. ELECTRICAL TEST:**

- (1).100% OPEN SHORT & MISS WIRE TEST;
- (2).INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3).CONTACTOR RESISTANCE:30 OHM MAX

2.PRINTING:GHMT® roline CAT.6A U/UTP COMPONENT PATCH CORD LSZH 500MHZ ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3.100% Component Patch cord Test PASS

4.Minimum bending radius:60mm

**MATERIAL LIST**

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Orange	2PCS	
②	CONNECTOR	RJ45 8P8C'S UNSHIELDED PIN GOLD PLATED 3u", Transparent Blue	2PCS	
①	CABLE	S/FTP CAT.6A 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:Orange (PANTONE:1575C)

ITEM NO.	LENGTH (L)	TOLERANCE (T)
21. 15. 2988	300mm	± 10mm
21. 15. 2770	500mm	± 15mm
21. 15. 2771	1000mm	± 30mm
21. 15. 2774	1500mm	± 45mm
21. 15. 2772	2000mm	± 60mm
21. 15. 2773	3000mm	± 90mm
21. 15. 2775	5000mm	± 150mm
21. 15. 2776	7500mm	± 210mm
21. 15. 2777	10000mm	± 300mm
21. 15. 2778	15000mm	± 450mm
21. 15. 2779	20000mm	± 600mm

ITEM NO.	21. 15. 2988	21. 15. 2770	21. 15. 2771	21. 15. 2772	21. 15. 2773
21. 15. 2774	21. 15. 2775	21. 15. 2776	21. 15. 2777	21. 15. 2778	21. 15. 2779
DESC.	ROLINE U/UTP PatchCord CAT. 6A, LSOH, Comp. Level1, Orange				

		NEW		
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
			2016-09-13	A

