


$$L=X+100/0\text{mm}$$

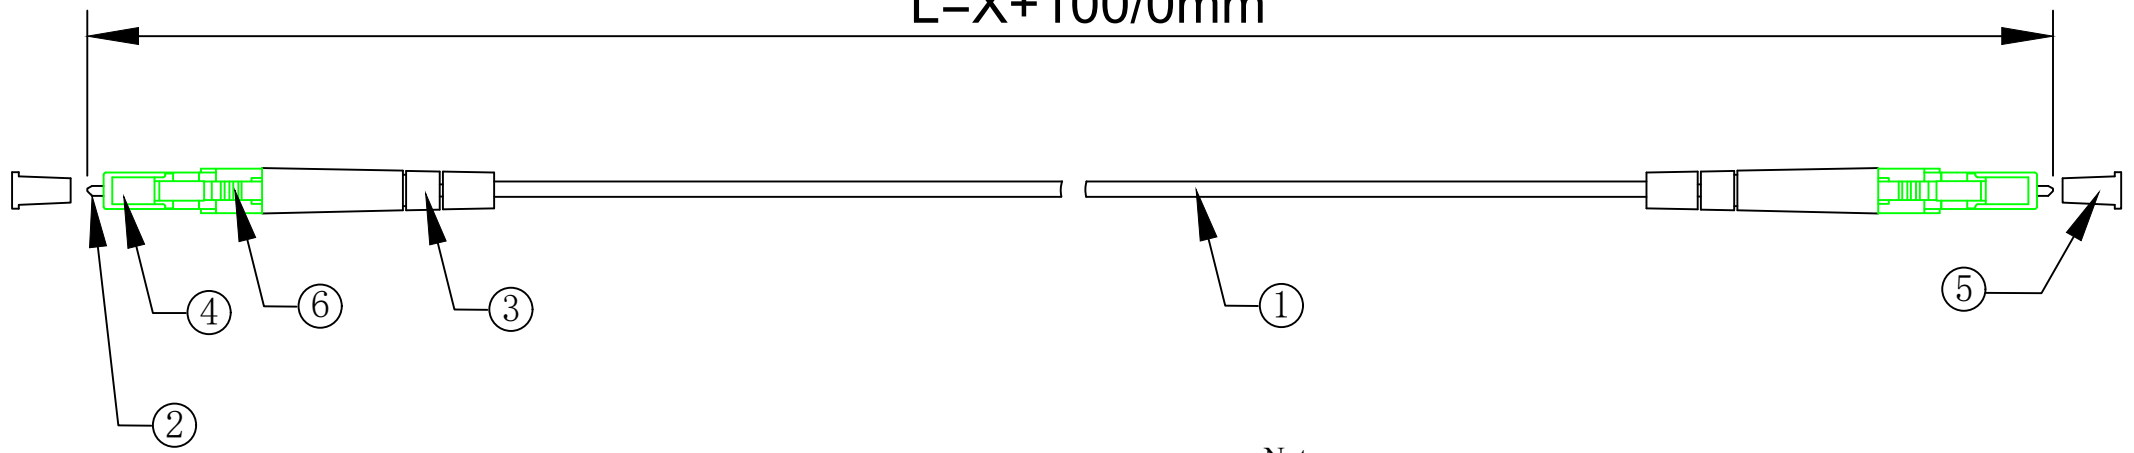

Note:

RoHS 2.0 and REACH Compliant

Test Grade Designation: Each to Reference		
Grade IL/RL	SINGLE-MODE	
Insertion Loss (IL)	≤0.3dB	IEC 61300-3-4
Return Loss (RL)	APC ≥60dB	IEC 61300-3-6
Test Wavelength	1310nm	
End face inspection	×400	

**MATERIAL LIST:**

⑥	LC Simplex Clip Green	2pcs	
⑤	LC Dust Cap White	2pcs	
④	LC Simplex Connector Green	2pcs	
③	LC 3.0 Boot White	2pcs	
②	LC/APC SM Ferrule	2pcs	
①	Fiber Optical Cable Simplex OS2 9/125 (G657.A2) Ø3.0mm LSZH White Armored (only Stainless steel spiral pipe, no Stainless Steel braiding)	L+0.1m	

ITEM NO.	LENGTH
21. 15. 8600	1m
21. 15. 8601	2m
21. 15. 8602	3m
21. 15. 8603	5m

DESC. Roline FO Jumper Armoured cable, OS2 Simplex, LSOH, LC/APC-LC/APC

NO.	SPECIFICATION STANDARD	QT' Y	REMARK
BY	CHK	REVISION RECORD MODIFICATIONS	DATE REV.



NEW 2022-01-20 A