
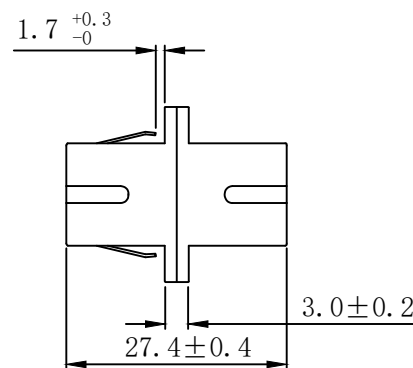


NOTE:
RoHS 2.0 & Reach Compliant

Insertion Loss (dB)	≤0.20
Operating Temperature (°C)	-40 ~ +80
Storage Temperature (°C)	-40 ~ +85

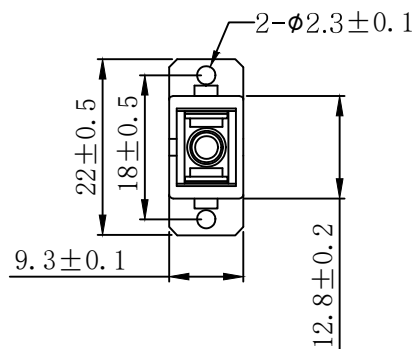

MATERIAL LIST:

⑤	SC Sleeve Ceramic	1pcs	
④	SC Blue Bush	2pcs	
③	SC Simplex Blue Body with flange	2pcs	
②	SC Simplex Metal Mount	1pcs	
①	SC Black Dust Cap	2pcs	
NO.	SPECIFICATION STANDARD	QT'Y	REMARK

21.99.0670	Value SC Simplex Plastic Body, w/Flange (OS2)
------------	---

ITEM NO.	Product description
----------	---------------------

SECOMP

NEW

2022-02-07

A

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
----	-----	-------------------------------	------	------