
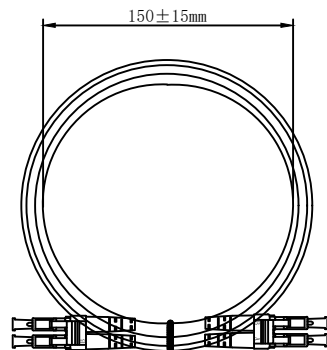


Note:  
 ROHS 2.0 & REACH Compliant  
 2. The out jacket is conform to IEC60332-1, EN60754-2, EN 61034-2  
 3. Min. Bending Radius: Static: 30mm, Dynamic: 60mm

TYPE	MULTI-MODE
Insertion Loss	≤0.3dB
Return Loss	≥30dB
Test Wavelength	850nm

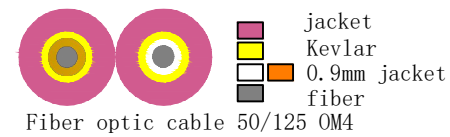

⑭	Ring 1 2	4pcs	
⑬	ST Connector	2pcs	
⑫	ST Dust Cap	2pcs	
⑪	ST Black Boot	1pcs	
⑩	ST Red Boot	1pcs	
⑨	ST MM Ferrule	2pcs	
⑧	Black Heat Shrink Tube	2pcs	
⑦	LC Erika violet Duplex Clip	1pcs	
⑥	LC MM Erika violet Duplex Connector	2pcs	21.99.8770
⑤	LC Dust Cap White	2pcs	21.99.8771
④	LC White Boot	1pcs	21.99.8772
③	LC White Boot	1pcs	21.99.8773
②	LC/UPC MM Ferrule	2pcs	21.99.8775
①	Fiber Optical Cable Duplex $\phi$ 3.0mm OM4 50/125um Erika violet LSZH	L+0.1m	21.99.8778

ITEM NO.	Product description
21.99.8770	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/ST, Erika violet, 0.5m
21.99.8771	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/ST, Erika violet, 1m
21.99.8772	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/ST, Erika violet, 2m
21.99.8773	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/ST, Erika violet, 3m
21.99.8775	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/ST, Erika violet, 5m
21.99.8778	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/ST, Erika violet, 10m

NO.	SPECIFICATION STANDARD	QT'Y	REMARK
	Add Min. Bending Radius	2022-1-24	A1
	NEW	2018-1-10	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE
			REV.

