



Datenblatt - Fiche technique - Data sheet




**26.99.0353**



VALUE Kat.6 19"-Patchpanel, 24 P, geschirmt, schwarz

VALUE Panneau de brassage Cat.6 19", 24 ports, STP, noir

VALUE Cat.6/Class E 19" Patch Panel, 24 Ports, STP, black

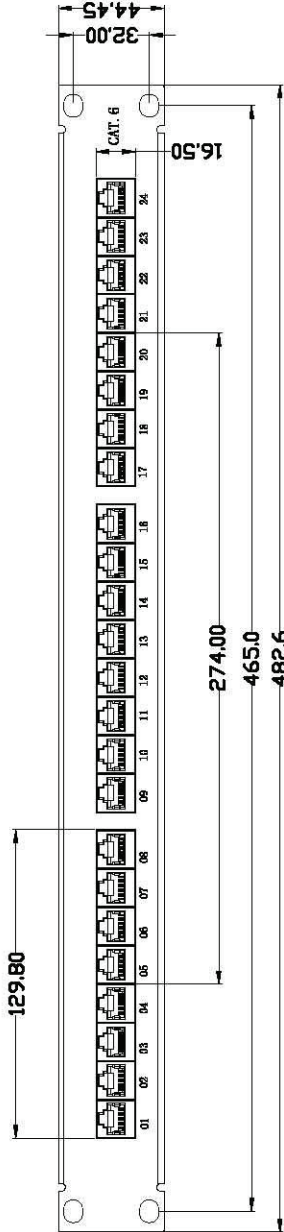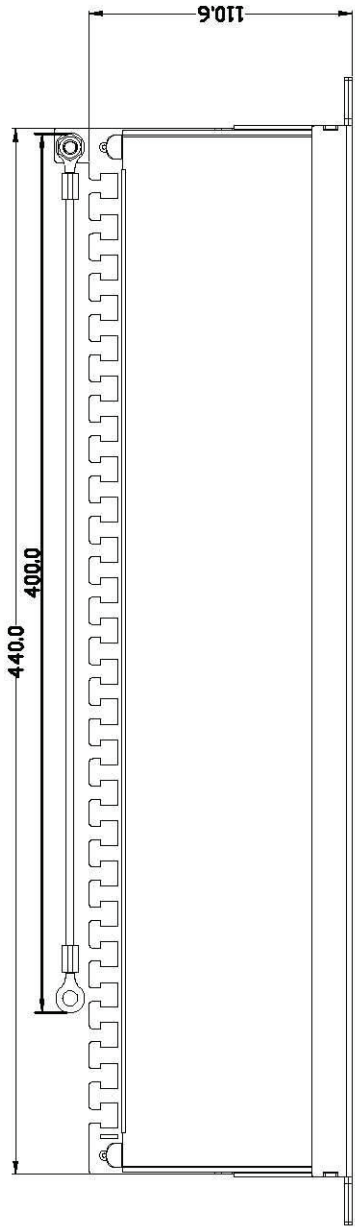

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125V AC RMS
- 2. CURRENT RATING : 1.5A IHD
- 3. CONTACT RESISTANCE : 100 MILLI OHMS MAX
- 4. INSULATION RESISTANCE : 1000M OHMS MIN @ 500V DC
- 5. DIELECTRIC STRENGTH : 750V AC RMS 60Hz, 1MIN
- 6. CAT. 6 PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 B. 2-1

ENVIRONMENTAL:

- 1. STORAGE : -40° TO+85°
- 2. OPERATION : 0° TO+70°
- RJ45 JACK COMPLY TO REQUIREMENTS OF IEC-60603-7-5 MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68 MECHANICAL.

1. SHIELD MATERIAL BRASS C2680 T=0.25MM

2. HOUSING MATERIAL PBT+15%GF UL94V0

3. CONTACT MATERIAL PHOSHOR BRONZE PLATING GOLD

4. PANEL FRAME ZN PLATING

5. IDC MATERIAL: PC UL94V0 TERMINAL:PHOSPHOR BRONZE, TIN PLATING

6. RJ45 JACK LIFE: 750 TIMES MIN

7. LDN LIFE : 200 TIMES MIN

8. RETENTIVENESS OF INSERTION STRUCTURE: 50N 60±5s

PATCH PANEL COLOR:BLACK

PACKING: 1PCS/PE BAG /INNER CARTON, 5PCS/OUTER CARTON

MATERIAL LIST:

⑦	Bottom Panel :	1.5mm thickness Metallic Panel(SECC)	1	
⑥	Upper Panel Cover :	1.0mm thickness Metallic Panel(SECC)	1	
⑤	RJ45 Jack :	Housing-Fireproof PBT UL-94V0 Pin-8P8C 3u" gold plated	24	
④	PCB :	1.6mm UL-94V0	3	
③	IDC Body:	Fireproof PC/ABS UL-94V0/With Colour Coded Printing T568A/B	24	
②	IDC Pin :	Phosphor Bronze & Tinned	192	
①	IDC Terminal:	For 22-26 AWG Cable	24	
NO.			QT' Y	REMARK

**Rotronic Co., Ltd.**

Item No.: 26.99.0353

Title: VALUE Cat.6 19" Patch Panel, 24 Ports, STP, black

DRAWN BY	CHECK BY	APPRO BY	UNIT	MM
CHENHJUAN	CHENHJUAN	JINGZHANG		DATE
				2009-07-31

2009-07-31 A

NEW

REVISION RECORD MODIFICATIONS

CHK

BY

REV.

DATE