



Datenblatt - Fiche technique - Data sheet




26.99.0354



VALUE Kat.6 19"-Patchpanel, 24 P, geschirmt, grau

VALUE Panneau de brassage Cat.6 19", 24 ports, STP, gris

VALUE Cat.6/Class E 19" Patch Panel, 24 Ports, STP, grey

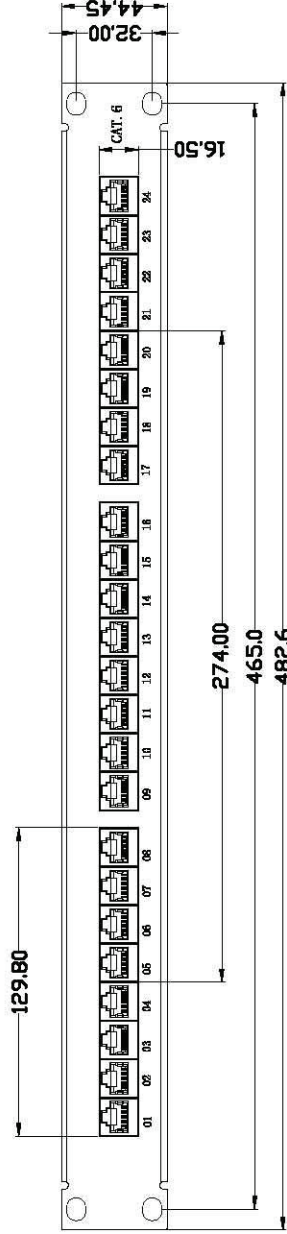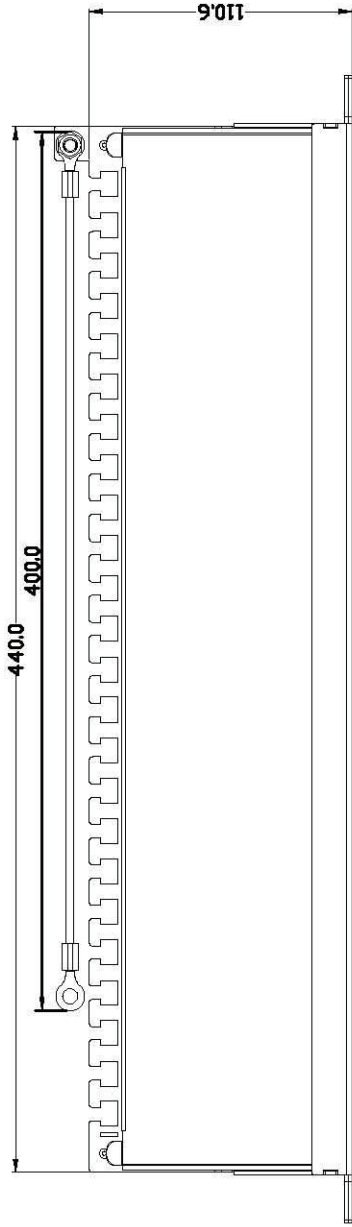

MATERIAL LIST:

NO.	QT' Y	REMARK
⑦	1	Bottom Panel : 1.5mm thickness Metallic Panel(SECC)
⑥	1	Upper Panel Cover : 1.0mm thickness Metallic Panel(SECC)
⑤	24	RJ45 Jack : Housing-Fireproof PBT UL-94V0 Pin-8P8C 3u" gold plated
④	3	PCB : 1.6mm UL-94V0
③	24	IDC Body : Fireproof PC/ABS UL-94V0/With Colour Coded Printing T568A/B
②	192	IDC Pin : Phosphor Bronze & Tinned
①	24	IDC Terminal: For 22-26 AWG Cable

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125V AC RMS
- 2. CURRENT RATING : 1.5A MD
- 3. CONTACT RESISTANCE : 100 MILLI OHMS MAX
- 4. INSULATION RESISTANCE : 1000M OHMS MIN @ 500V DC
- 5. DIELECTRIC STRENGTH : 750V AC RMS 60Hz, 1MIN
- 6. CAT. 6 PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 B. 2-1

ENVIRONMENTAL:

- 1. STORAGE : -40° TO+85°
- 2. OPERATION : 0° TO+70°
- RJ45 JACK COMPLY TO REQUIREMENTS OF IEC-60603-7-5
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

MECHANICAL:

- 1. SHIELD MATERIAL BRASS C2680 T=0.25MM
- 2. HOUSING MATERIAL PBT+15%GF UL94V0
- 3. CONTACT MATERIAL PHOSHOR BRONZE PLATING GOLD
- 4. PANEL FRAME ZN PLATING
- 5. IDC MATERIAL: PC UL94V0 TERMINAL:PHOSPHOR BRONZE, TIN PLATING
- 6. RJ45 JACK LIFE: 750 TIMES MIN
- 7. LDN LIFE : 200 TIMES MIN
- 8. RETENTIVENESS OF INSERTION STRUCTURE: 50N 60±5s

PATCH PANEL COLOR: GRAY RAL 7035

PACKING: 1PCS/PE BAG /INNER CARTON, 5PCS/OUTER CARTON

Rotronic Co., Ltd.

Item No.: 26.99.0354

Title: VALUE Cat.6 19" Patch Panel, 24 Ports, STP, grey

				UNIT	MM
DRAWNBY	CHECKBY	APPROBY	DATE		
CHENHJUAN	CHENHJUAN	JINGZHANG	2009-07-31		

2009-07-31	A	REV.
DATE		

NEW
REVISION RECORD MODIFICATIONS

BY CHK