


# ROLINE UTP Patch Cord, Cat.6 (Class E), yellow, 0.5 m

|                           |               |
|---------------------------|---------------|
| <b>Product No.</b>        | 21.15.1522    |
| <b>Manufacturer</b>       | ROLINE        |
| <b>Manufacturer No.</b>   | 21.15.1522    |
| <b>EAN (single piece)</b> | 7611990156214 |

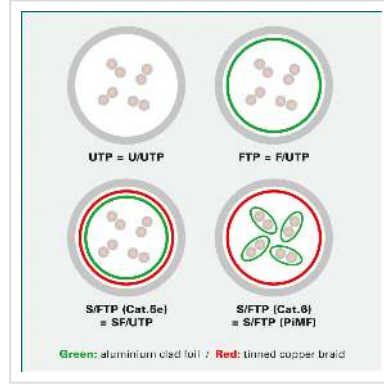

Patch cable for networking connections between devices. Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. High quality plugs with gold plated contacts. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 4-pair stranded copper wire.

For a structured cabling system we recommend to use the following components: ROLINE Cat.6 UTP Cable, Solid Wire, AWG23: 21.15.0990 (100 m), 21.15.0991 (300 m); ROLINE Cat.6 Flush Mount Wall Jack, unshielded: 25.16.8494 (white), 25.16.8500 (ivory); ROLINE Cat.6 Surface Mount Wall Jack, unshielded: 25.16.8394 (white), 25.16.8395 (ivory); ROLINE Cat.6 19" Patch Panel, 24 Ports, unshielded: 26.11.0355 (light grey), 26.11.0362 (black); ROLINE Cat.6 UTP Patch Cord, grey, 5 m: 21.15.0935. The accredited German laboratory GHMT has tested and certified this product combination, in a Channel of 100 meters, as being compliant to Class E specifications; certificate no. z2329b-10-E (with flush mount)/z2330b-10-E (with surface mount).

## Technical specifications

|               |                    |
|---------------|--------------------|
| Manufacturer  | ROLINE             |
| Product group | Twisted Pair Cable |
| Product type  | UTP Patch Cables   |

|                                    |                |
|------------------------------------|----------------|
| Colour                             | yellow         |
| Length                             | 0.5 m          |
| Shield type                        | UTP            |
| Transfer quality                   | Cat6 / Class E |
| Impedance                          | 100 Ohm        |
| Quantity of wires                  | 8              |
| Conductor type                     | Wire           |
| Crossed                            | no             |
| Locking lever                      | no             |
| Anti-kink sleeve                   | Moulded-on     |
| Colour (Spout)                     | yellow         |
| Cable LSOH                         | no             |
| Side 1 Connector Type              | RJ-45          |
| Side 1 Connector Gender            | Male           |
| Side 2 Connector Type              | RJ-45          |
| Side 2 Connector Gender            | Male           |
| Connector Type RJ45                | Standard       |
| Weight                             | 25.6 g         |
| Height of packaging (single piece) | 10 mm          |
| Width of packaging (single piece)  | 180 mm         |
| Depth of packaging (single piece)  | 240 mm         |
| Package weight (single piece)      | 0.03 kg        |