


# VALUE USB 3.2 Gen 2 Compatible Cable, PD (Power Delivery) 60W, C-C, M/M, white, 3 m

<b>Product No.</b>	11.99.9065
<b>Manufacturer</b>	VALUE
<b>Manufacturer No.</b>	11.99.9065
<b>EAN (single piece)</b>	7630049634299

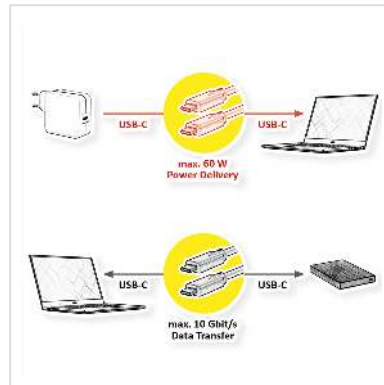

## USB 3.1 / USB 3.2 Gen 2 compatible cable with a data transmission rate of up to 10 Gbit/s and Power Delivery support of up to 60W!

- High quality USB 3.1 / USB 3.2 Gen 2 compatible cable with improved shielding
- With the reversible Type C connectors at both ends
- Gold-plated contacts for low wear at high plugging cycles
- Suitable for data transfer rates of up to 10 Gbit/s
- Supports USB Power Delivery to 60W
- Supports video transfer

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

### Technical specifications

Manufacturer	VALUE
Product group	Cable
Product type	USB 3.2 Cable
Colour	white
Length	3 m

Transfer quality	USB 3.2 Gen 2 SuperSpeed 10 Gbit/s (USB 3.1 Gen 2, USB 3.1)
Connection ports	USB Type C (USB-C) Male / USB Type C (USB-C) Male
Side 1 Connector Type	USB Type C (USB-C)
Side 1 Connector Gender	Male
Side 2 Connector Type	USB Type C (USB-C)
Side 2 Connector Gender	Male
Colour (Cable)	white
Maximum data transfer rate	10 Gbit/s
Area of application	External
Supported charging technology	USB-PD - USB Power Delivery
Power (max.)	60 W
Cable shielding	Screened
Material (external cable mantle)	TPE
Operating temperature min.	0 °C
Operating temperature max.	45 °C
Storage temperature min.	-20 °C
Storage temperature max.	70 °C
Weight	211 g
Height of packaging (single piece)	30 mm
Width of packaging (single piece)	170 mm
Depth of packaging (single piece)	170 mm

---

Package weight (single piece) 0.13 kg