
## VALUE Cable USB4 Gen3x2, with Emark, C-C, M/M, 240W, black, 0.8 m

| Product No.        |  |
|--------------------|--|
| Manufacturer       |  |
| Manufacturer No.   |  |
| EAN (single piece) |  |

11.99.9089 VALUE 11.99.9089 7630049627901



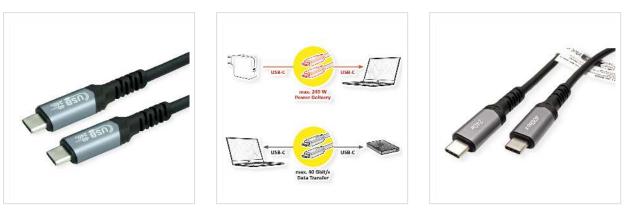

## High quality USB 4 Gen 3x2 cable with the reversible USB-C connector on both ends for data transfer rates of up to 40 Gbit/s and USB Power Delivery up to 48V / 5A (240 W).

- High quality USB4 Gen 3x2 cable with improved shielding
- With the reversible Type C connectors at both ends
- Gold-plated contacts for low wear at high plugging cycles
- Suitable for data transfer rates of up to 40 Gbit/s
- Supports USB Power Delivery to 48V / 5A

The major benefits of the USB4 includes faster transfer speeds (up to 40 Gbit/s), a better management of video bandwidth (using a process called "protocol tunneling" that sends DisplayPort, PCIe and USB packets at the same time while allocating bandwidth accordingly) and optional compatibility with Thunderbolt 3 products.

| Technical specifications |            |  |
|--------------------------|------------|--|
| Manufacturer             | VALUE      |  |
| Product group            | Cable      |  |
| Product type             | USB4 Cable |  |
| Colour                   | black      |  |
| Length                   | 0.8 m      |  |

| Transfer quality                      | USB4 Gen3x2 40 Gbit/s                             |
|---------------------------------------|---|
| Connection ports                      | USB Type C (USB-C) Male / USB Type C (USB-C) Male |
| Side 1 Connector Type                 | USB Type C (USB-C)                                |
| Side 1 Connector<br>Gender            | Male  |
| Side 2 Connector Type                 | USB Type C (USB-C)                                |
| Side 2 Connector<br>Gender            | Male  |
| Colour (Cable)                        | black   |
| Maximum data transfer<br>rate         | 40 Gbit/s   |
| Area of application                   | External  |
| Supported charging<br>technology      | USB-PD - USB Power Delivery                       |
| Power (max.)                          | 240 W   |
| Cable shielding                       | Screened  |
| Hand locking screws                   | no  |
| Weight                                | 39 g  |
| Height of packaging<br>(single piece) | 10 mm   |
| Width of packaging<br>(single piece)  | 130 mm  |
| Depth of packaging<br>(single piece)  | 140 mm  |
| Package weight (single<br>piece)      | 0.04 kg   |