
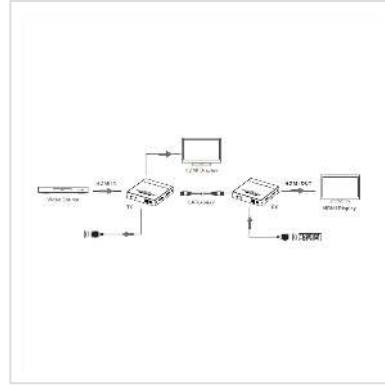


VALUE HDMI Extender, IPCOLOR over IP, 4K60Hz, 120m

Product No. 14.99.3568
Manufacturer VALUE
Manufacturer No. 14.99.3568

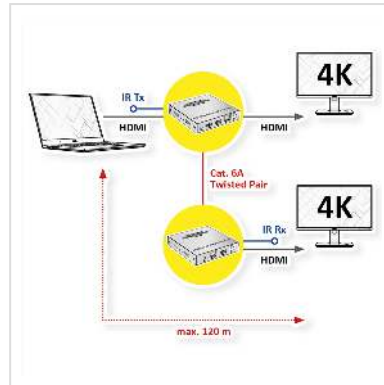

2160p
UHD-1

4K

3D
capable

This is a 4K@60Hz HDMI extender kit, consisting of a transmitter and a receiver, using ipcolor STREAM technology for high resolution, low latency transmission. The 4K@60Hz HDMI signal can be extended up to 120m via Category 6 or higher network cables. One-to-one connections, one-to-many connections via gigabit switches or one-to-many connections via gigabit switch cascades are supported. Also HDMI loop-out, IR passback and RS-232 pass-through functions are supported. This extender kit is perfect for meetings, home entertainment, educational presentations and many other areas.

- Supports up to 3840 x 2160@60Hz resolution, backwards compatible
- Compatible with Cat5/5e/6 or above network cables
- Max. transmission distance with Cat.6 or higher network cable is 120 m
- ipcolor STREAM technology (high-definition and low-latency transmission)
- Supports one-to-one connections and one-to-many connections through gigabit switches

- The transmitter supports HDMI loop out
- Supports IR passback (20 - 60kHz) and RS-232 passthrough.
- Compliant with HDCP 1.4 and HDCP 2.2
- Dimensions (TX, RX each): 21 x 106 x 103 mm
- Weight TX: 254 g, RX: 242 g

Technical specifications

Manufacturer	VALUE
Product group	Video Extender
Product type	HDMI Extender
Colour	black
Scope of delivery	1x Transmitter, 1x Receiver, 2x Power Adapter, 1x IR Receiver Extension Cable, 1x IR Blaster Extension Cable, 4x Mounting Ears, 2x Terminal Blocks (RS-232), User Manual
Interface	HDMI
Inputs	1
Outputs	2
Max. distance	120 m
Video input	TX: 1x HDMI, RX: 1x RJ-45
Video output	TX: 1x HDMI Loop-Out, 1x RJ-45, RX: 1x HDMI
Video band width	18 Gbps
Max. resolution (nom.)	3840 x 2160@60Hz
Max. resolution	3840 x 2160 @60Hz (4K, UHD-1)
Dimensions (HxWxD)	21 x 106 x 103 mm
Power supply unit	2x
Power supply output	5 V DC, 1A
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Storage temperature min.	-30 °C
Storage temperature max.	70 °C
Height	21 mm
Width	106 mm
Depth	103 mm

Weight	496 g
--------	-------

Height of packaging (single piece)	0 mm
---------------------------------------	------

Width of packaging (single piece)	0 mm
--------------------------------------	------

Depth of packaging (single piece)	0 mm
--------------------------------------	------

Package weight (single piece)	0 kg
----------------------------------	------