


# VALUE HDMI Matrix, 4x2, 4K30Hz, QUAD Multi-Viewer, seamless switching

**Product No.** 14.99.3592  
**Manufacturer** VALUE  
**Manufacturer No.** 14.99.3592

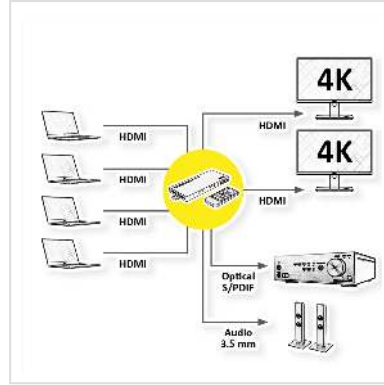

2160p

4K

**This VALUE HDMI 4x2 Matrix, 4K30Hz Quad Multi Viewer supports four HDMI input sources that can be displayed on one screen with five multi-view modes. The four HDMI inputs can be switched seamlessly. You can control it via the front button, IR control and RS-232 control.**

- Application example: A display device (monitor, TV, projector, etc.) is supplied by up to four HDMI sources (PC, notebook, etc.). By pushing the button on the switch, or by using the remote control, the desired source can be selected. 5 different different display modes are possible. If only one source is active, the switch automatically switches to this source.
- Switching between PCs is done via buttons on the switch, via remote control or via RS232
- Max. resolution is 4K@30Hz (3840x2160)
- Installation is possible without software - only the HDMI cables have to be connected to the Quad Multi Viewer.
- Compliant with HDCP 1.4
- Flat, black metal housing
- 5 different display modes possible: 2x2 same picture mode, Left/right picture mode, Top/bottom picture mode, One large picture top and three small pictures bottom mode, PIP (Picture in Picture) mode
- Input: 4x HDMI A Female

- Output: 2x HDMI A Female
- 1x Stereo Audio Output and 1x Toslink Digital Audio Output
- Contents: Main Unit, Power Supply, Remote Control, User Manual

### Technical specifications

|                                    |  |
|------------------------------------|--|
| Manufacturer                       | VALUE  |
| Product group                      | Splitters and selectors                                    |
| Product type                       | HDMI-Video-Switch  |
| Colour                             | black  |
| Scope of delivery                  | Main Unit, Power Adapter, Remote Control, User Manual      |
| Interface                          | HDMI   |
| Inputs                             | 4  |
| Outputs                            | 2  |
| Video input                        | 4x HDMI Female   |
| Video output                       | 2x HDMI Female   |
| Audio output                       | 1x Stereo Audio Output and 1x Toslink Digital Audio Output |
| Max. resolution (nom.)             | 3840 x 2160@30Hz   |
| Dimensions (HxWxD)                 | 18 x 215 x 90 mm   |
| Power supply output                | 5 V DC, 1A   |
| Technical particularity            | Switching by push botton, remote control or by RS-232      |
| Operating temperature min.         | 0 °C   |
| Operating temperature max.         | 70 °C  |
| Height                             | 18 mm  |
| Width                              | 215 mm   |
| Depth                              | 90 mm  |
| Weight                             | 450 g  |
| Height of packaging (single piece) | 0 mm   |
| Width of packaging (single piece)  | 0 mm   |

Depth of packaging  
(single piece) 0 mm

Package weight (single  
piece) 0 kg