


ROLINE RM UTP Patch Cord Cat.6A, yellow, 10 m

| | |
|---------------------------|--------------------------|
| Product No. | 21.45.3127 |
| Manufacturer | ROLINE RECYCLED MATERIAL |
| Manufacturer No. | 21.45.3127 |
| EAN (single piece) | 7630049630697 |

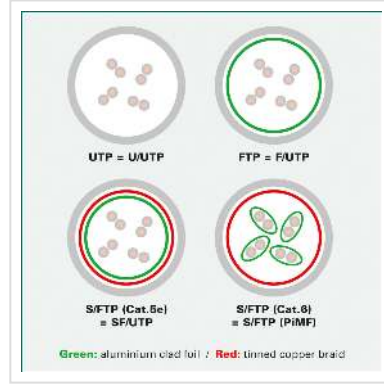

Unshielded, pre-assembled category 6A network cable with RJ-45 plugs at both ends. The patch cable from our ROLINE Recycled Material product line is suitable as a patch cable in patch panels or as a device connection cable and is intended for use in local networks.

- Patch cable for networking connections between devices
- Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends
- Durable due to moulded kink protection
- Flexible cable, suitable for narrow bending
- High quality plugs with gold plated contacts
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire

ROLINE RECYCLED MATERIAL products consist of more than 50% recycled materials. The packaging is even made from 100% recycled material.

Technical specifications

| | |
|---------------|--------------------------|
| Manufacturer | ROLINE RECYCLED MATERIAL |
| Product group | Twisted Pair Cable |
| Product type | UTP Patch Cables |

| | |
|------------------------------------|------------------|
| Colour | yellow |
| Length | 10 m |
| Shield type | UTP |
| Transfer quality | Cat6A / Class EA |
| Component-Level certified | yes |
| Quantity of wires | 8 |
| Conductor type | Wire |
| Crossed | no |
| Locking lever | yes |
| Anti-kink sleeve | Moulded-on |
| Colour (Spout) | yellow |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | Standard |
| Operating temperature min. | -20 °C |
| Operating temperature max. | 75 °C |
| Storage temperature min. | -20 °C |
| Storage temperature max. | 80 °C |
| Weight | 223.9 g |
| Height of packaging (single piece) | 40 mm |
| Width of packaging (single piece) | 150 mm |

| | |
|--------------------------------------|--------|
| Depth of packaging (single piece) | 150 mm |
|--------------------------------------|--------|

| | |
|----------------------------------|---------|
| Package weight (single piece) | 0.25 kg |
|----------------------------------|---------|