


# ROLINE RM UTP Patch Cord Cat.6A, black, 1.5 m

|                           |                          |
|---------------------------|--------------------------|
| <b>Product No.</b>        | 21.45.3154               |
| <b>Manufacturer</b>       | ROLINE RECYCLED MATERIAL |
| <b>Manufacturer No.</b>   | 21.45.3154               |
| <b>EAN (single piece)</b> | 7630049630970            |

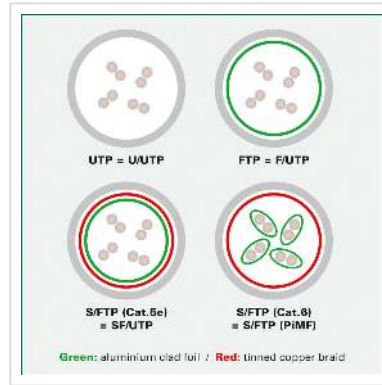

**Unshielded, pre-assembled category 6A network cable with RJ-45 plugs at both ends. The patch cable from our ROLINE Recycled Material product line is suitable as a patch cable in patch panels or as a device connection cable and is intended for use in local networks.**

- Patch cable for networking connections between devices
- Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends
- Durable due to moulded kink protection
- Flexible cable, suitable for narrow bending
- High quality plugs with gold plated contacts
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire

**ROLINE RECYCLED MATERIAL products consist of more than 50% recycled materials. The packaging is even made from 100% recycled material.**

## Technical specifications

|               |                          |
|---------------|--------------------------|
| Manufacturer  | ROLINE RECYCLED MATERIAL |
| Product group | Twisted Pair Cable       |
| Product type  | UTP Patch Cables         |

|                                    |                  |
|------------------------------------|------------------|
| Colour                             | black            |
| Length                             | 1.5 m            |
| Shield type                        | UTP              |
| Transfer quality                   | Cat6A / Class EA |
| Component-Level certified          | yes              |
| Quantity of wires                  | 8                |
| Conductor type                     | Wire             |
| Crossed                            | no               |
| Locking lever                      | yes              |
| Anti-kink sleeve                   | Moulded-on       |
| Colour (Spout)                     | black            |
| Side 1 Connector Type              | RJ-45            |
| Side 1 Connector Gender            | Male             |
| Side 2 Connector Type              | RJ-45            |
| Side 2 Connector Gender            | Male             |
| Connector Type RJ45                | Standard         |
| Operating temperature min.         | -20 °C           |
| Operating temperature max.         | 75 °C            |
| Storage temperature min.           | -20 °C           |
| Storage temperature max.           | 80 °C            |
| Weight                             | 41.1 g           |
| Height of packaging (single piece) | 10 mm            |
| Width of packaging (single piece)  | 130 mm           |

---

|                                      |        |
|--------------------------------------|--------|
| Depth of packaging<br>(single piece) | 150 mm |
|--------------------------------------|--------|

|                                  |          |
|----------------------------------|----------|
| Package weight (single<br>piece) | 0.045 kg |
|----------------------------------|----------|