
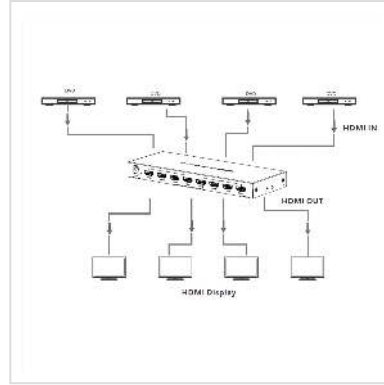


# VALUE HDMI Matrix Switch, 4x4, 4K60Hz, with remote control

**Product No.** 14.99.3593  
**Manufacturer** VALUE  
**Manufacturer No.** 14.99.3593

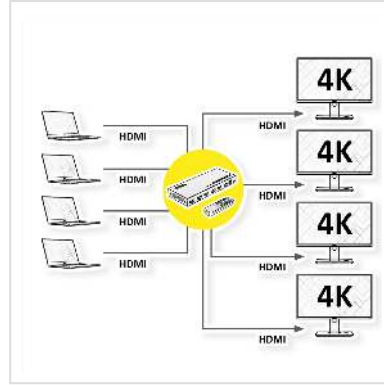

**This 4 in 4 out HDMI Matrix can switch 4 HDMI input signals (PC, notebook, etc.) to 4 HDMI displays (monitor, projector, etc.) with resolutions up to 4096x2160@60Hz. It supports multiple switching methods (buttons on the matrix, IR remote control and RS232). Any two of the four HDMI outputs support automatic down-scaling. This matrix can be used in security surveillance, education, training, exhibitions, trade shows, broadcasting, command centers and many other applications.**

- Four HDMI input signals can be switched to four HDMI output devices
- Up to 4K (4096 x 2160 @60Hz) resolution and backwards compatible
- Compatible with HDCP 2.2 and HDCP 1.4
- Any two of the four HDMI outputs support auto down-scaling.
- Supported digital audio formats: DTS-HD/Dolby-TrueHD/LPCM7.1/DTS/Dolby-Atmos
- Input devices can be switched by push buttons on the switch, IR remote control or by RS-232
- 16 different EDID states / resolutions can be set with the DIP switch
- Contents: HDMI Matrix Switch, Power Supply, Remote Control, Mounting Ears (2x), Terminal Block, User Manual

## Technical specifications

Manufacturer	VALUE
Product group	Splitters and selectors
Product type	HDMI-Matrix-Switch 4K
Colour	black
Scope of delivery	HDMI Matrix Switch, Power Supply, Remote Control, Mounting Ears (2x), Terminal Block, User Manual
Interface	HDMI
Inputs	4
Outputs	4
Max. bandwidth	600 MHz
Video input	4x HDMI Female
Video output	4x HDMI Female
Video band width	18 Gbps
Max. resolution (nom.)	4096 x 2160 @60Hz (4K)
Max. resolution	4096 x 2160 @60Hz (4K)
Dimensions (HxWxD)	21 x 210 x 80 mm
Power supply output	5V DC, 1A
Technical particularity	Switching via push buttons, via IR remote control or via RS-232
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Storage temperature min.	-30 °C
Storage temperature max.	70 °C
Height	21 mm
Width	210 mm
Depth	80 mm
Weight	375 g

Height of packaging (single piece)	0 mm
---------------------------------------	------

Width of packaging (single piece)	0 mm
--------------------------------------	------

Depth of packaging (single piece)	0 mm
--------------------------------------	------

Package weight (single piece)	0 kg
----------------------------------	------